

MARTIN MARIETTA ENERGY SYSTEMS LIBRARIES




3 4456 0349639 4

ORNL 1701
Engineering

ex. 47

FORCED CONVECTION HEAT TRANSFER
BETWEEN PARALLEL PLATES AND IN
ANNULI WITH VOLUME HEAT SOURCES
WITHIN THE FLUIDS

H. F. Poppendiek
L. D. Palmer

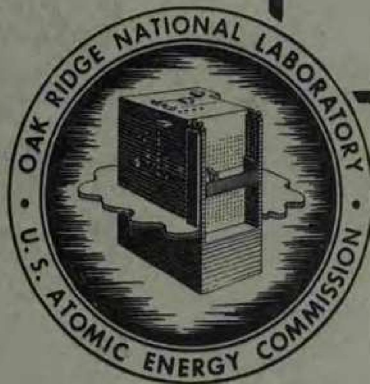

CENTRAL RESEARCH LIBRARY
DOCUMENT COLLECTION

LIBRARY LOAN COPY

DO NOT TRANSFER TO ANOTHER PERSON

If you wish someone else to see this document,
send in name with document and the library will
arrange a loan.

OAK RIDGE NATIONAL LABORATORY
OPERATED BY
CARBIDE AND CARBON CHEMICALS COMPANY
A DIVISION OF UNION CARBIDE AND CARBON CORPORATION



POST OFFICE BOX P
OAK RIDGE, TENNESSEE

ORNL-1701

Copy No. 47

Contract No. W-7405, eng 26

Reactor Experimental Engineering Division

FORCED CONVECTION HEAT TRANSFER BETWEEN PARALLEL
PLATES AND IN ANNULI WITH VOLUME HEAT
SOURCES WITHIN THE FLUIDS


by

H. F. Poppendiek
L. D. Palmer

DATE ISSUED:

MAY 11 1954

OAK RIDGE NATIONAL LABORATORY
Operated by
CARBIDE AND CARBON CHEMICALS COMPANY
A Division of Union Carbide and Carbon Corporation
Post Office Box P
Oak Ridge, Tennessee



3 4456 0349639 4



INTERNAL DISTRIBUTION

- | | |
|--|----------------------------------|
| 1. C. E. Center | 45. W. R. Gall |
| 2. Biology Library | 46. H. F. Poppendiek |
| 3. Health Physics Library | 47. S. E. Beall |
| 4-5. Central Research Library | 48. J. P. Gill |
| 6. Reactor Experimental
Engineering Library | 49. D. D. Cowen |
| 7-11. Laboratory Records Department | 50. W. M. Breazeale (consultant) |
| 12. Laboratory Records, ORNL R.C. | 51. R. A. Charpie |
| 13. C. E. Larson | 52. L. G. Alexander |
| 14. L. B. Emlet (K-25) | 53. E. S. Bettis |
| 15. J. P. Murray (Y-12) | 54. E. P. Blizard |
| 16. A. M. Weinberg | 55. E. G. Bohlmann |
| 17. E. H. Taylor | 56. J. O. Bradfute |
| 18. E. D. Shipley | 57. H. C. Claiborne |
| 19. C. E. Winters | 58. S. I. Cohen |
| 20. F. C. VonderLage | 59. G. A. Cristy |
| 21. R. C. Briant | 60. M. C. Edlund |
| 22. J. A. Swartout | 61. W. K. Ergen |
| 23. S. C. Lind | 62. A. P. Fraas |
| 24. F. L. Culler | 63. N. D. Greene |
| 25. A. H. Snell | 64. D. C. Hamilton |
| 26. A. Hollaender | 65. H. W. Hoffman |
| 27. M. T. Kelley | 66. P. R. Kasten |
| 28. W. J. Fretague | 67. G. W. Keilholtz |
| 29. G. H. Clewett | 68. N. F. Lansing |
| 30. K. Z. Morgan | 69. G. C. Lawson |
| 31. T. A. Lincoln | 70. F. E. Lynch |
| 32. A. S. Householder | 71. C. B. Mills |
| 33. C. S. Harrill | 72. L. D. Palmer |
| 34. D. S. Billington | 73. W. D. Powers |
| 35. D. W. Cardwell | 74. M. W. Rosenthal |
| 36. E. M. King | 75. H. W. Savage |
| 37. R. N. Lyon | 76. O. Sisman |
| 38. J. A. Lane | 77. D. G. Thomas |
| 39. A. J. Miller | 78. J. M. Warde |
| 40. R. B. Briggs | 79. P. C. Zuola |
| 41. A. S. Kitzes | 80-114. H. F. Poppendiek |
| 42. O. Sisman | 115. R. W. Bussard |
| 43. R. W. Stoughton | 116. M. J. Skinner |
| 44. C. B. Graham | 117. W. D. Manly |

EXTERNAL DISTRIBUTION

- 118. R. F. Bacher, California Institute of Technology
- 119. A.F. Plant Representative, Wood-Ridge (Attn: S. V. Manson)
- 120-369. Given distribution as shown in TID-4500 under Engineering Category



TABLE OF CONTENTS

	<u>PAGE</u>
SUMMARY.....	6
NOMENCLATURE.....	7
INTRODUCTION.....	9
LAMINAR FLOW ANALYSIS.....	10
TURBULENT FLOW ANALYSIS.....	14
DISCUSSION.....	23
APPENDIX 1.....	24
APPENDIX 2.....	27
APPENDIX 3.....	30
REFERENCES.....	32

SUMMARY

This paper concerns itself with forced convection heat transfer between parallel plates which are infinite in extent and ducting fluids containing uniform volume heat sources; also heat is transferred uniformly to or from the fluids through the parallel plates. Dimensionless differences between the plate wall temperature and the mixed-mean fluid temperature are evaluated in terms of several dimensionless moduli. These analyses pertain to the laminar and turbulent flow regimes and liquid metals as well as ordinary fluids. The solutions may also be used to estimate heat transfer in annulus systems whose inner to outer radius ratios do not differ significantly from unity.

NOMENCLATURE

Letters

A	cross sectional heat transfer area, ft^2
a	fluid thermal diffusivity, ft^2/hr
B_0	parameter in equation (o), ft/hr
c_p	fluid heat capacity, $\text{Btu}/\text{lb } ^\circ\text{F}$
f'	parameter in equation (r), dimensionless
g	gravitational force per unit mass, ft/hr^2
h	heat transfer conductance, $\text{Btu}/\text{hr ft}^2 ^\circ\text{F}$
k	fluid thermal conductivity, $\text{Btu}/\text{hr ft}^2 (^\circ\text{F}/\text{ft})$
p	fluid pressure, lbs/ft^2
q	heat transfer rate, Btu/hr
r	radial distance from centerline of parallel plate system, ft
r_d	radial position at which the reference temperature t_d is stipulated, ft
r_0	half the distance between the two parallel plates, ft
t	fluid temperature at position n, $^\circ\text{F}$
t_d	a reference temperature at radius r_d , $^\circ\text{F}$
t_m	mixed-mean fluid temperature, $^\circ\text{F}$
t_o	fluid temperature at plate walls, $^\circ\text{F}$
t_c	fluid temperature at the parallel plate system center, $^\circ\text{F}$
u	fluid velocity at n, ft/hr
u_m	mean fluid velocity, ft/hr

W	volume heat source, Btu/hr ft ³
x	axial distance, ft
y	radial distance from parallel plate walls, ft
γ	fluid weight density, lbs/ft ³
ϵ	eddy diffusivity, ft ² /hr
S	friction factor defined in equation (i) dimensionless
μ	absolute viscosity of fluid, lb hr/ft ²
ν	fluid kinematic viscosity, ft ² /hr
ρ	fluid mass density, lbs hr ² /ft ⁴
τ	fluid shear stress at position n, lbs/ft ²
τ_0	fluid shear stress at parallel plate walls, lbs/ft ²

Dimensionless Moduli

$$F' = 1 - \frac{1}{Wr_0} \left(\frac{dq}{dA} \right)$$

$$n = y/r_0$$

$$n_L = y_L/r_0$$

$$Nu = h \ 4r_0/k, \text{ Nusselt Modulus}$$

$$Pr = \gamma \nu c_p/k, \text{ Prandtl Modulus}$$

$$Re = u_m \ 4r_0/\nu$$

$$u^+ = \frac{u}{\sqrt{\frac{\tau_0}{\rho}}}$$

$$y^+ = \frac{y \sqrt{\frac{\tau_0}{\rho}}}{\nu}$$

INTRODUCTION

The mathematical heat transfer analyses to be presented here for a parallel plates system are accomplished much in the same manner as were those for a pipe system presented previously in reference 1. The present analyses as well as those given in reference 1 can be used to determine the temperature structure in flowing fluids that possess internal sources of heat generation. Such volume heat sources may result from nuclear or chemical reactions or may be generated electrically.

The idealized volume-heat-source system considered in this paper is defined by the following postulates:

1. Thermal and hydrodynamic patterns have been established (parallel plates of infinite extent).
2. Uniform volume heat sources exist within the fluids.
3. Physical properties are not functions of temperature.
4. Heat is transferred uniformly to or from the fluid at the plate walls.
5. In the case of turbulent flow the generalized turbulent velocity profile defines the hydrodynamic structure.
6. In the case of turbulent flow there exists an analogy between heat and momentum transfer.

LAMINAR FLOW ANALYSIS

The differential equation describing heat transfer in the parallel plates system for the case of laminar flow is

$$\frac{3}{2} u_m \left[1 - \left(\frac{r}{r_0} \right)^2 \right] \frac{\partial t}{\partial x} = a \frac{\partial^2 t}{\partial r^2} + \frac{W}{\gamma c_p} \quad (1)$$

where,

- u_m , mean fluid velocity
- t , temperature
- x , axial distance
- r , radial distance
- a , thermal diffusivity
- W , uniform volume heat source
- γ , fluid weight density
- c_p , fluid heat capacity

One boundary condition is represented by the uniform wall-heat-flux which may be positive, negative or zero,

$$\frac{dq}{dA} (r = r_0) = \left(\frac{dq}{dA} \right)_o = -k \frac{\partial t}{\partial r} (r = r_0) \quad (2)$$

where $\frac{dq}{dA}$ is the radial heat flux and $\left(\frac{dq}{dA} \right)_o$ is the wall heat flux. The second boundary condition is, t_d , a reference temperature, such as a wall or center-line temperature,

$$t(r = r_d) = t_d \quad (3)$$

Note, the mixed-mean fluid temperature may also be specified as the reference temperature.

Downstream from the entrance region where the thermal pattern (temperature gradients) of the system has become established, the axial temperature gradient, $\frac{\partial t}{\partial x}$, is uniform and equal to the mixed-mean axial fluid temperature gradient¹, $\frac{\partial t_m}{\partial x}$. The latter gradient can be obtained by making the following heat rate balance. The heat generated in a lattice whose volume is $2r_o dx$ (the width of the lattice being unity) plus the heat transferred into or out of the lattice at the plate walls must all be lost from the lattice by convection, that is,

$$W 2r_o dx - \left(\frac{dq}{dA}\right)_o 2dx = 2r_o u_m \gamma c_p \left(\frac{\partial t_m}{\partial x}\right) dx \quad (4)$$

Hence, in the established flow region the axial temperature gradient is

$$\frac{\partial t}{\partial x} = \frac{\partial t_m}{\partial x} = \frac{W - \frac{1}{r_o} \left(\frac{dq}{dA}\right)_o}{u_m \gamma c_p} \quad (5)$$

Upon substituting equation (5) into equation (1), the following total differential equation results:

$$\frac{W}{k} \left[\frac{3}{2} F' \left(1 - \left(\frac{r}{r_o} \right)^2 \right) - 1 \right] = \frac{d^2 t}{dr^2} \quad (6)$$

-
1. Note, that the mixed-mean fluid temperature at any given axial position is defined as,

$$t_m = \frac{\int_0^{r_o} t u dr}{\int_0^{r_o} u dr} = \frac{1}{u_m r_o} \int_0^{r_o} t u dr$$

where $F' = 1 - \frac{1}{Wr_0} \left(\frac{dq}{dA} \right)_0$. Equation (6) can be solved upon making two integrations. The first integration plus boundary equation (2) yields,

$$\frac{dt}{dr} = \frac{W}{k} \left[\left(\frac{3F'}{2} - 1 \right) r - \frac{F'}{2r_0^2} r^3 \right] \quad (7)$$

A second integration gives the desired temperature solution,

$$\frac{t - t_0}{\frac{Wr_0^2}{k}} = \left[\left(\frac{3F'}{4} - 2 \right) \left(\left(\frac{r}{r_0} \right)^2 - 1 \right) - \frac{F'}{8} \left(\left(\frac{r}{r_0} \right)^4 - 1 \right) \right] \quad (8)$$

where the reference temperature is, t_0 , the wall temperature. The temperature solution in terms of the centerline temperature rather than the wall temperature is given by

$$\frac{t - t_c}{\frac{Wr_0^2}{k}} = \left[\left(\frac{3F'}{4} - \frac{1}{2} \right) \left(\frac{r}{r_0} \right)^2 - \frac{F'}{8} \left(\frac{r}{r_0} \right)^4 \right] \quad (9)$$

where t_c is the centerline temperature. Equation (9) is graphed in Figure 1 for several values of the function F' .

The difference between the plate wall temperature and mixed-mean fluid temperature is defined by

$$t_0 - t_m = \frac{\int_0^{r_0} u(t_0 - t) dr}{u_m r_0} \quad (10)$$

Upon substituting the laminar velocity profile relation and equation (8) into equation (10) there results,

$$\frac{t_0 - t_m}{\frac{Wr_0^2}{k}} = \frac{17F' - 14}{35} \quad (11)$$

(Handwritten note: $\frac{17F' - 14}{35}$)

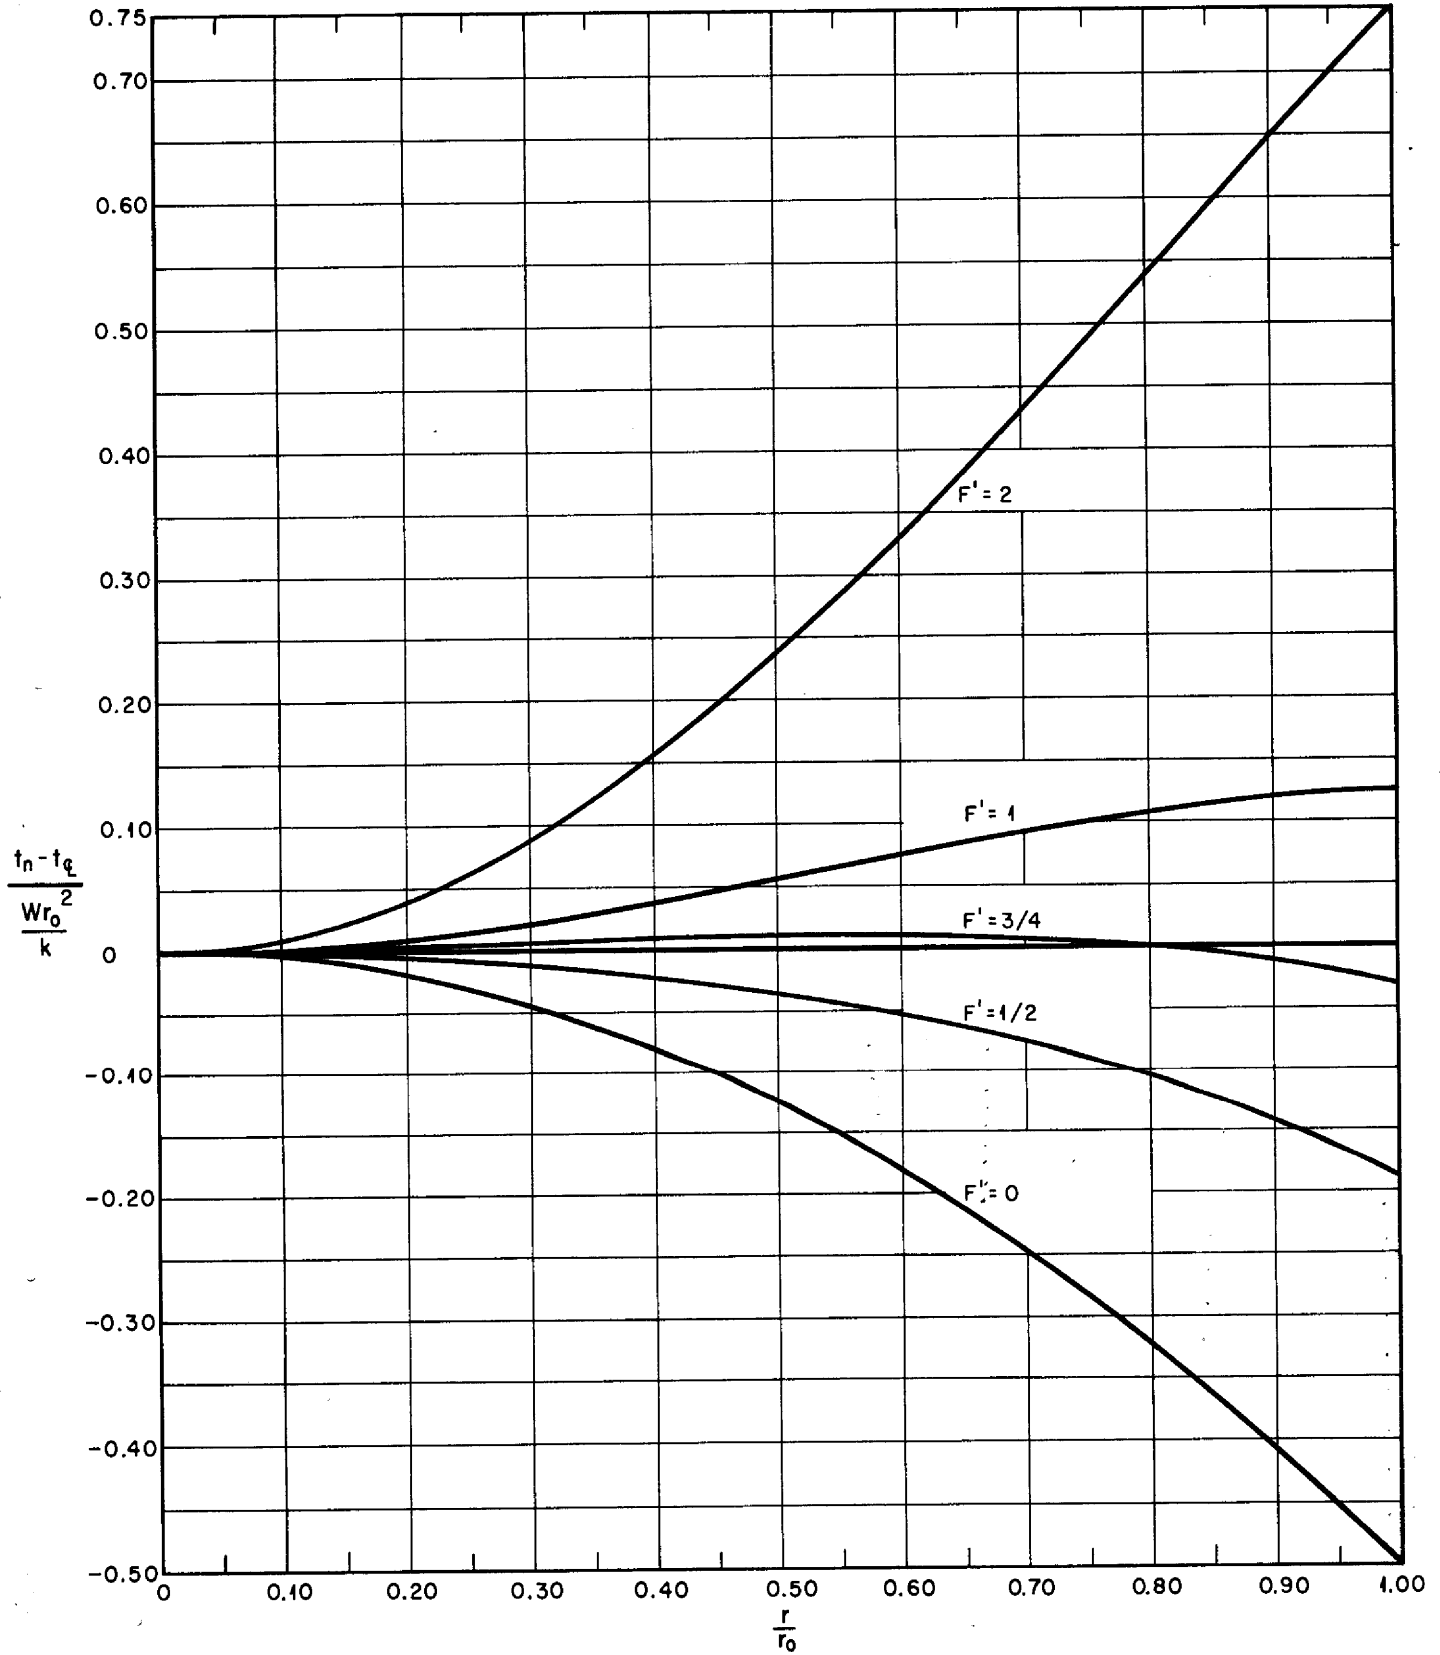


Fig. 1. Dimensionless Radial Temperature Distributions in a Parallel Plates System for Laminar Flow (Equation 9)

TURBULENT FLOW ANALYSIS

Fluid flow in pipes and channels (parallel plates systems) under turbulent flow conditions has been characterized in terms of a laminar sublayer contiguous to the wall, a buffer layer, and a turbulent core by Nikuradse, von Karman, and others. This structure has been presented in a general fashion by the well known generalized velocity profile which was shown together with the experimental data of Nikuradse, Reichardt, and Laufer in reference 1. Table 1 gives some of the specific hydrodynamic relations for the various flow layers in a parallel plates system; a discussion of some of the details of this table can be found in Appendix 1.

The differential equation describing heat transfer in a parallel plates system for the case of turbulent flow is

$$u(r) \frac{\partial t}{\partial x} = \frac{\partial}{\partial r} \left[(a + \epsilon) \frac{\partial t}{\partial r} \right] + \frac{W}{\gamma c_p} \quad (12)$$

where,

$u(r)$, the turbulent velocity profile (given by the generalized velocity profile)

ϵ , the eddy diffusivity² given in Table 1

Upon substituting equation (5) into equation (12) for the established thermal region, the following total differential equation results,


$$\frac{u(r) \left[W - \frac{1}{r_0} \left(\frac{dq}{dA} \right)_0 \right]}{u_m \gamma c_p} - \frac{W}{\gamma c_p} = \frac{d}{dr} \left[(a + \epsilon) \frac{dt}{dr} \right] \quad (13)$$

-
2. It is postulated that the heat and momentum transfer eddy diffusivities are equal as proposed by Reynolds and successfully used by von Karman, Martinelli and others.

TABLE I

HYDRODYNAMIC RELATIONS FOR THE VARIOUS FLOW LAYERS
BETWEEN PARALLEL PLATES

REGION	GENERALIZED VELOCITY DISTRIBUTION	SHEAR STRESS	STRESS EQUATION	EDDY DIFFUSIVITY
Laminar Sublayer $0 < y^+ < 5$ or $0 < \frac{y}{r_0} < \frac{131.5}{Re \cdot 9}$	$\frac{u}{\sqrt{\frac{\tau_0}{\rho}}} = \frac{\sqrt{\frac{\tau_0}{\rho}} y}{\nu}$	$\tau = \tau_0$	$\tau = \rho \nu \frac{du}{dy}$	$\frac{\epsilon}{\nu} = 0$
Buffer Layer $5 < y^+ < 30$ or $\frac{131.5}{Re \cdot 9} < \frac{y}{r_0} < \frac{789}{Re \cdot 9}$	$\frac{u}{\sqrt{\frac{\tau_0}{\rho}}} = -3.05 + 5.00 \ln \left[y \sqrt{\frac{\tau_0}{\rho}} \right]$	$\tau = \tau_0$	$\tau = \rho(\nu + \epsilon) \frac{du}{dy}$	$\frac{\epsilon}{\nu} = .0076 Re \cdot 9 \frac{y}{r_0} - 1$
Outer Turbulent Layer $\frac{789}{Re \cdot 9} < \frac{y}{r_0} < .5$	$\frac{u}{\sqrt{\frac{\tau_0}{\rho}}} = 5.5 + 2.5 \ln \left[\frac{y \sqrt{\frac{\tau_0}{\rho}}}{\nu} \right]$	$\tau = \tau_0 \left(1 - \frac{y}{r_0}\right)$	$\tau = \rho \epsilon \frac{du}{dy}$	$\frac{\epsilon}{\nu} = .0152 Re \cdot 9 \left(1 - \frac{y}{r_0}\right) \frac{y}{r_0}$
Inner Turbulent Layer $.5 < \frac{y}{r_0} < 1$	$\frac{u}{\sqrt{\frac{\tau_0}{\rho}}} = 5.5 + 2.5 \ln \left[\frac{y \sqrt{\frac{\tau_0}{\rho}}}{\nu} \right]$	$\tau = \tau_0 \left(1 - \frac{y}{r_0}\right)$	$\tau = \rho \epsilon \frac{du}{dy}$	$\frac{\epsilon}{\nu} = .0038 Re \cdot 9$

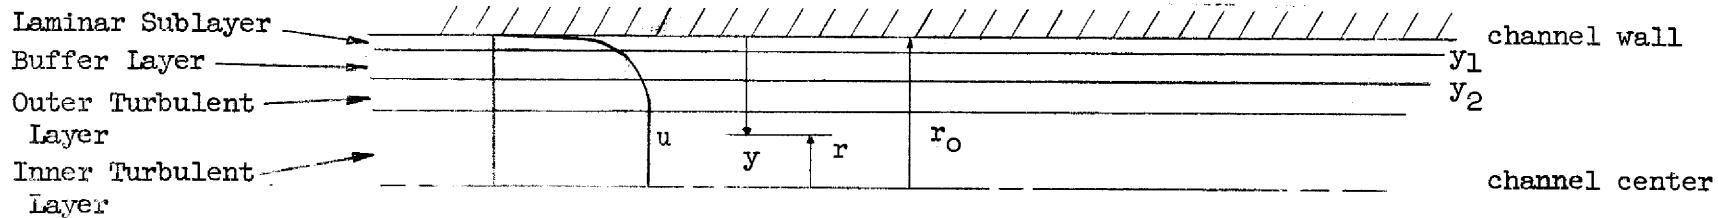

The boundary conditions are given by equations (2) and (3). As was done in the case of the pipe system (reference 1) the boundary value problem denoted by equations (13), (2) and (3) was separated into two somewhat simpler boundary value problems whose solutions can be superposed to yield the solution of the original problem. The two boundary value problems to be considered are,

$$\left. \begin{aligned} \frac{u(r)W}{u_m \gamma c_p} - \frac{W}{\gamma c_p} &= \frac{d}{dr} \left[(a + \epsilon) \frac{dt}{dr} \right] \\ \frac{dq}{dA} (r = r_o) &= 0 \\ t(r = r_d) &= t_{d1} \end{aligned} \right\} \quad (14)$$

$$\left. \begin{aligned} - \frac{u(r) \frac{1}{r_o} \left(\frac{dq}{dA} \right)_o}{u_m \gamma c_p} &= \frac{d}{dr} \left[(a + \epsilon) \frac{dt}{dr} \right] \\ \frac{dq}{dA} (r = r_o) &= \left(\frac{dq}{dA} \right)_o \\ t(r = r_d) &= t_{d2} \end{aligned} \right\} \quad (15)$$

Equations (14) represent a flow system with a volume heat source but with no plate-wall heat flux, and equations (15) represent a flow system without a volume heat source but with a uniform plate-wall heat flux. The superposition of the solutions of (14) and (15) yields the solution of the problem defined

by equations (13), (2) and (3), the sum of reference temperatures t_{d1} and t_{d2} being equal to the reference temperature t_d^3 . The problem defined by equations (15) has already been analyzed by others (see Martinelli, reference 2). The solution of equations (14) is outlined and evaluated in the following paragraphs.

The first integration of equations (14) expressed in terms of the radial heat flow yields,

$$\frac{dq}{dA} = W r_0 \int_0^n \frac{u}{u_m} dn - W r_0 n \quad (16)$$

where $n \equiv \frac{y}{r_0}$. The evaluation of the integral in equation (16) is presented in Appendix 2; the radial heat flow profiles for various Reynolds moduli are graphed in Figure 2.

The second integration of the differential equation of (14), yielding the desired temperature solution, was accomplished layer by layer, utilizing the hydrodynamic relations listed in Table 1 and the radial heat flow expressions developed in Appendix 2. The details of the procedure were presented in the previous analysis for the pipe system (reference 1). The resulting radial temperature profiles expressed in dimensionless form were determined as functions of Reynolds and Prandtl moduli; some typical radial temperature profiles are given in Figures 3 and 4.

3. Note, in the superposition process, all temperatures are expressed as differences.

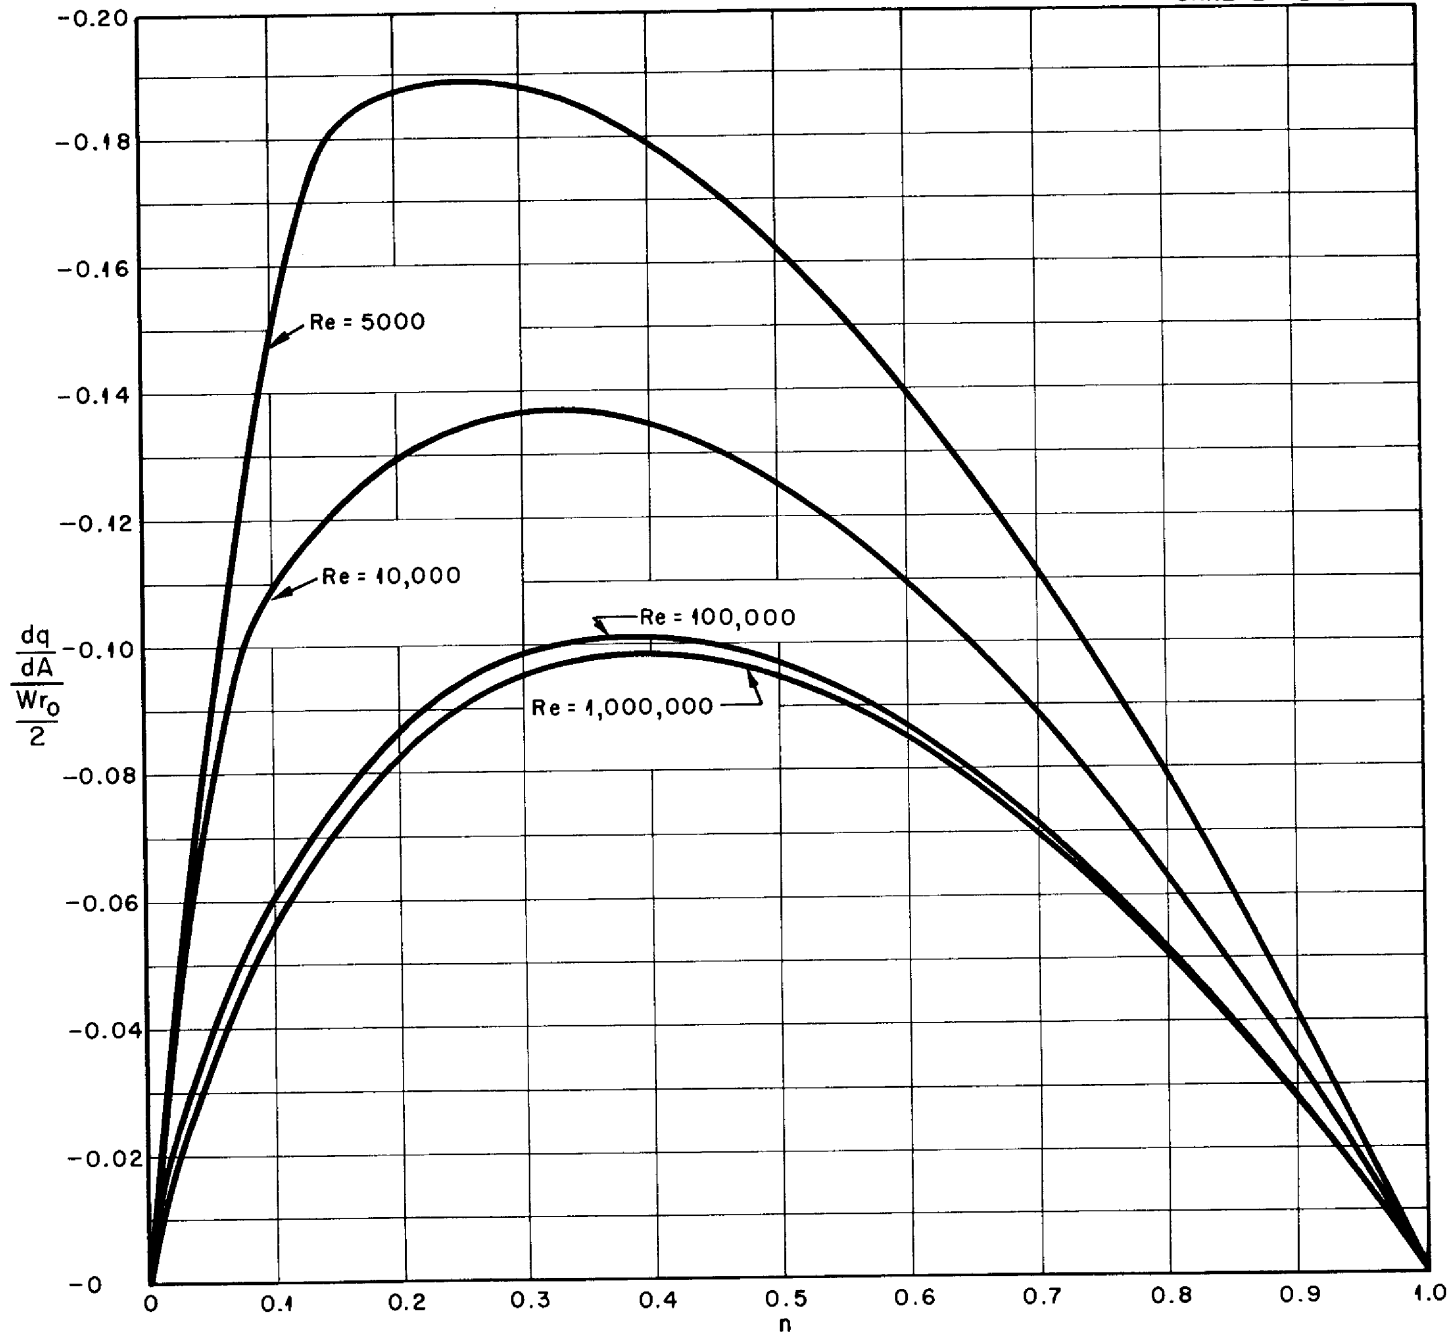


Fig. 2. Dimensionless Radial Heat Flow Profiles in a Parallel Plates System with no Wall Heat Transfer

UNCLASSIFIED
ORNL-LR-DWG-178

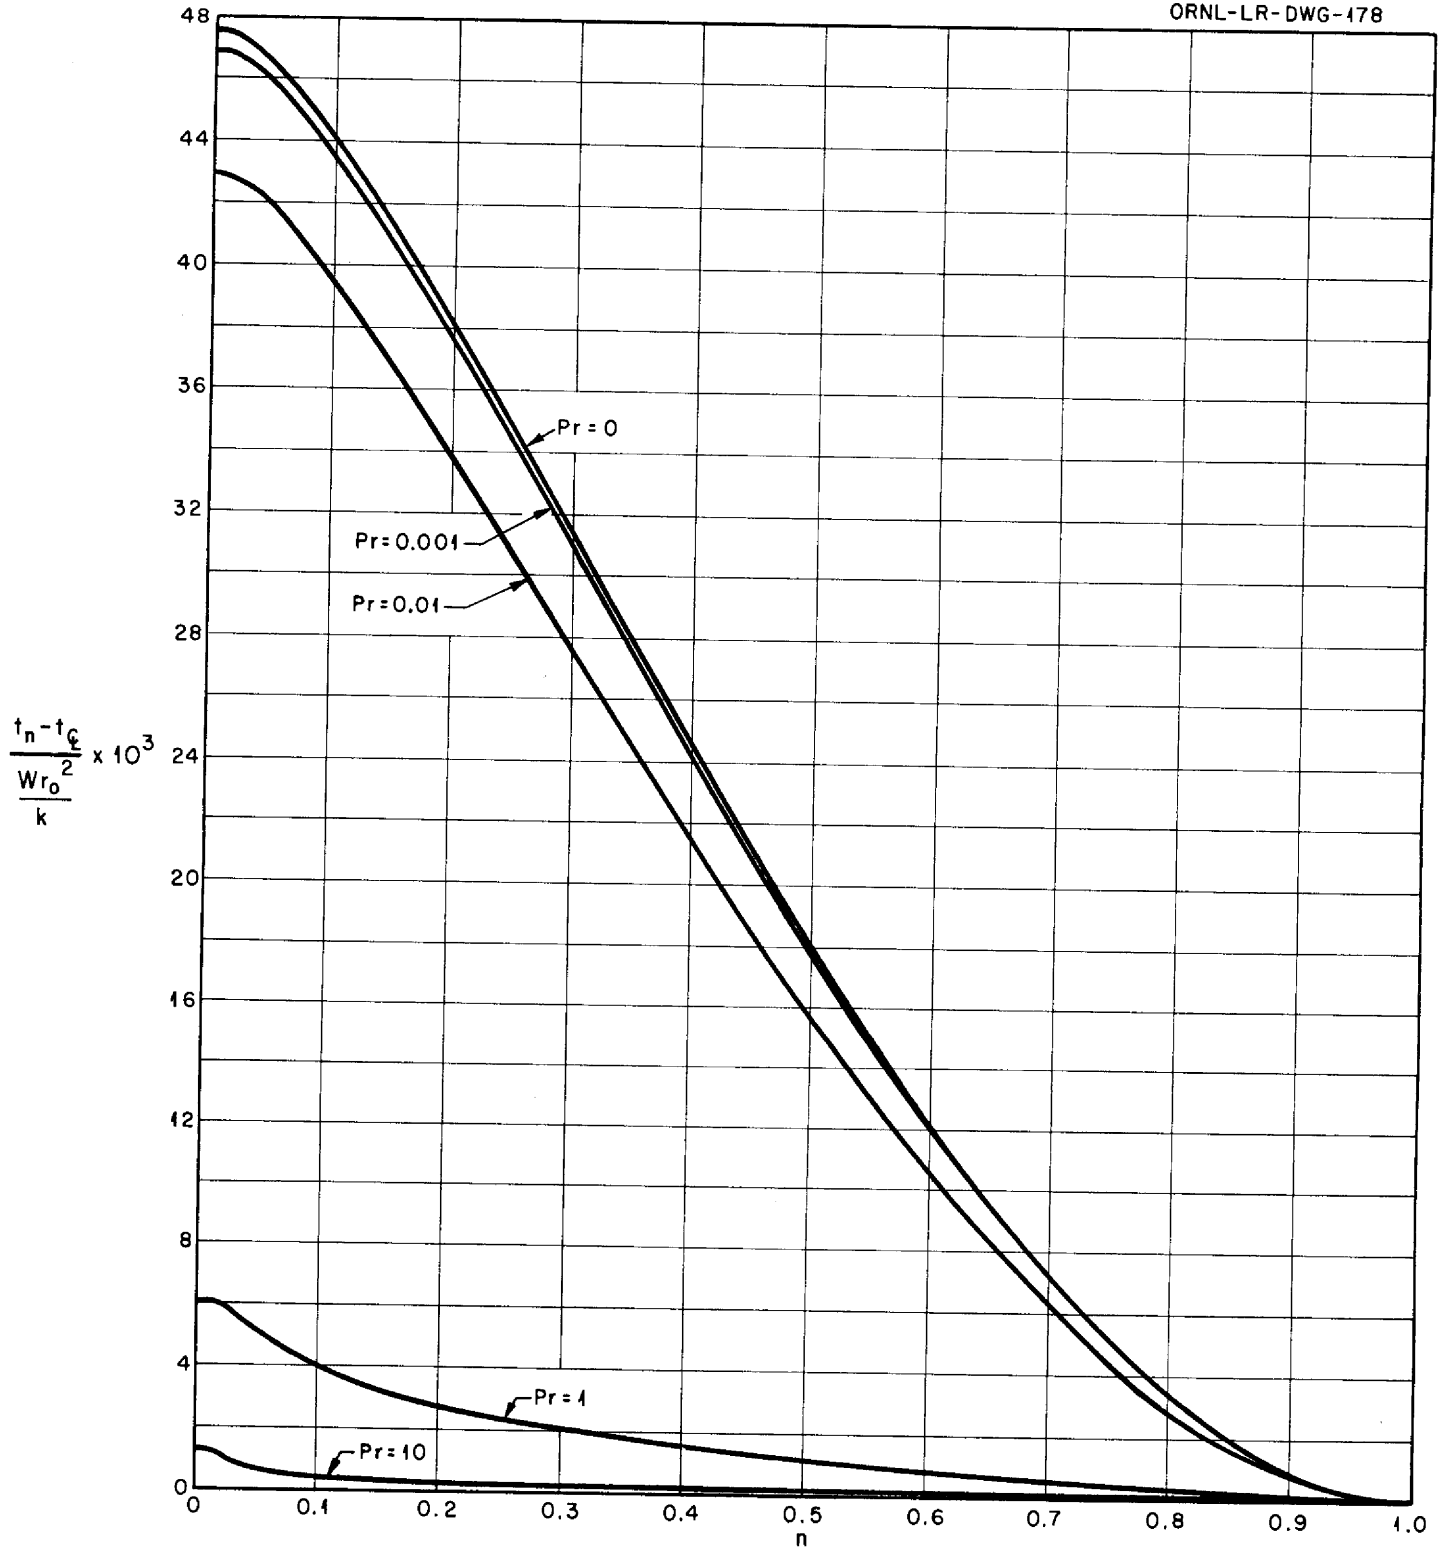


Fig. 3. Dimensionless Radial Temperature Distributions Within a Fluid Flowing Between Parallel Plates with Insulated Plates for Several Prandtl Moduli and $Re = 10,000$

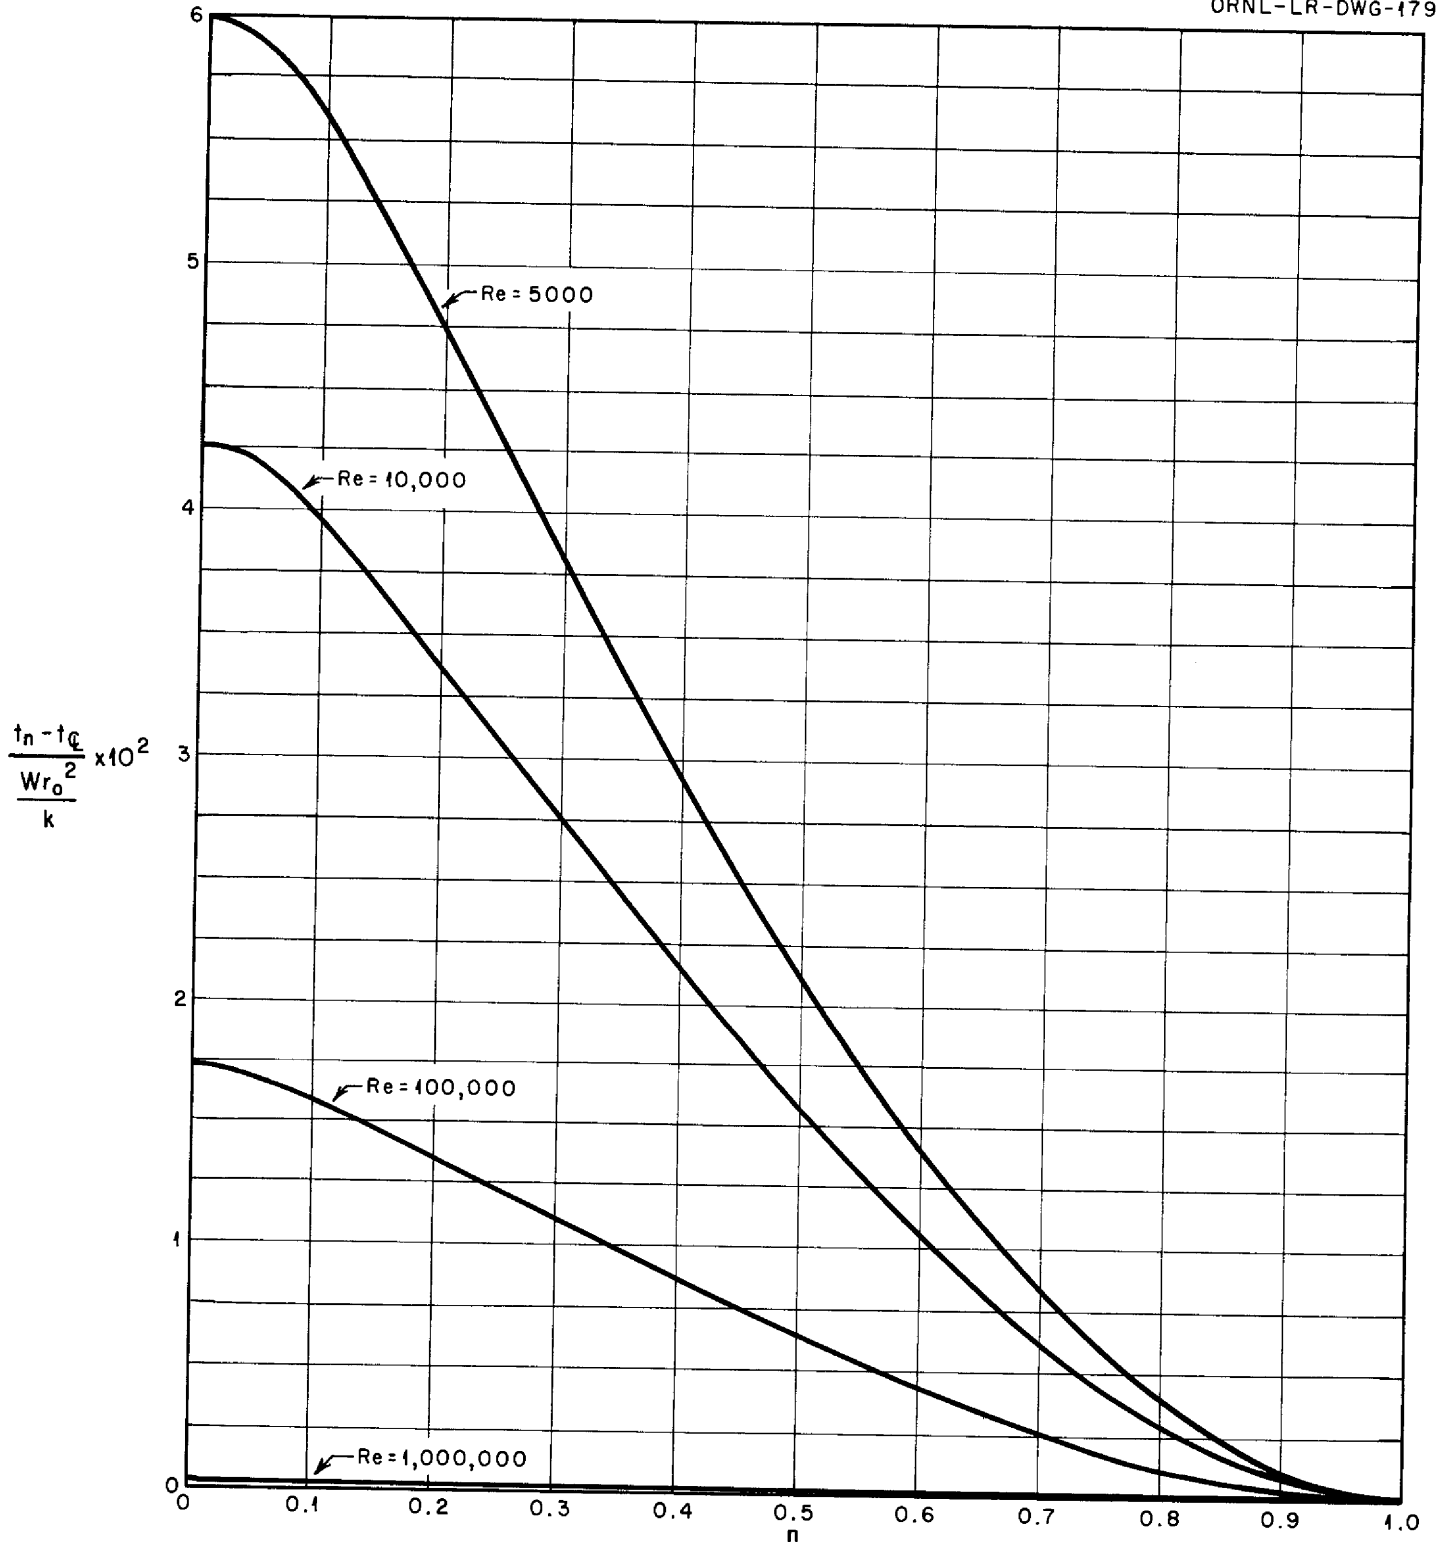


Fig. 4. Dimensionless Radial Temperature Distributions Within a Fluid Flowing Between Parallel Plates with Insulated Plates for Several Reynolds Moduli and $Pr = 0.04$

The difference between the plate wall temperature and the mixed-mean fluid temperature was obtained by evaluating the integral

$$\frac{t_o - t_m}{\frac{Wr_o^2}{k}} = \int_0^1 \frac{u}{u_m} \left(\frac{t_o - t}{\frac{Wr_o^2}{k}} \right) d \left(\frac{r}{r_o} \right) \quad (17)$$

The dimensionless temperature difference, $\frac{t_o - t_m}{\frac{Wr_o^2}{k}}$, is graphed as a function of Reynolds and Prandtl moduli in Figure 5.

The superposition of solutions of the boundary value problems (14) and (15) yields the more general boundary value problem defined by equations (13), (2) and (3). In the superposition process, all temperatures are expressed as temperature increments above datum temperatures. The radial temperature distribution above the wall temperature, centerline temperature, or mixed-mean fluid temperature for the composite boundary value problem defined by (13), (2), and (3) is obtained by adding the radial temperature distributions above the wall temperatures, centerline temperatures, or mixed-mean fluid temperatures, respectively of boundary value problems (14) and (15). Also, the rise in mixed-mean fluid temperature, at some point in the established flow region of the parallel plates system, above its value at the entrance for the problem defined by (13), (2) and (3) is obtained by adding the corresponding temperature rises for problems (14) and (15). The solution of boundary value problem (15) expressed in terms of Nusselt, Reynolds, and Prandtl moduli as developed by Martinelli is presented in Appendix 3.

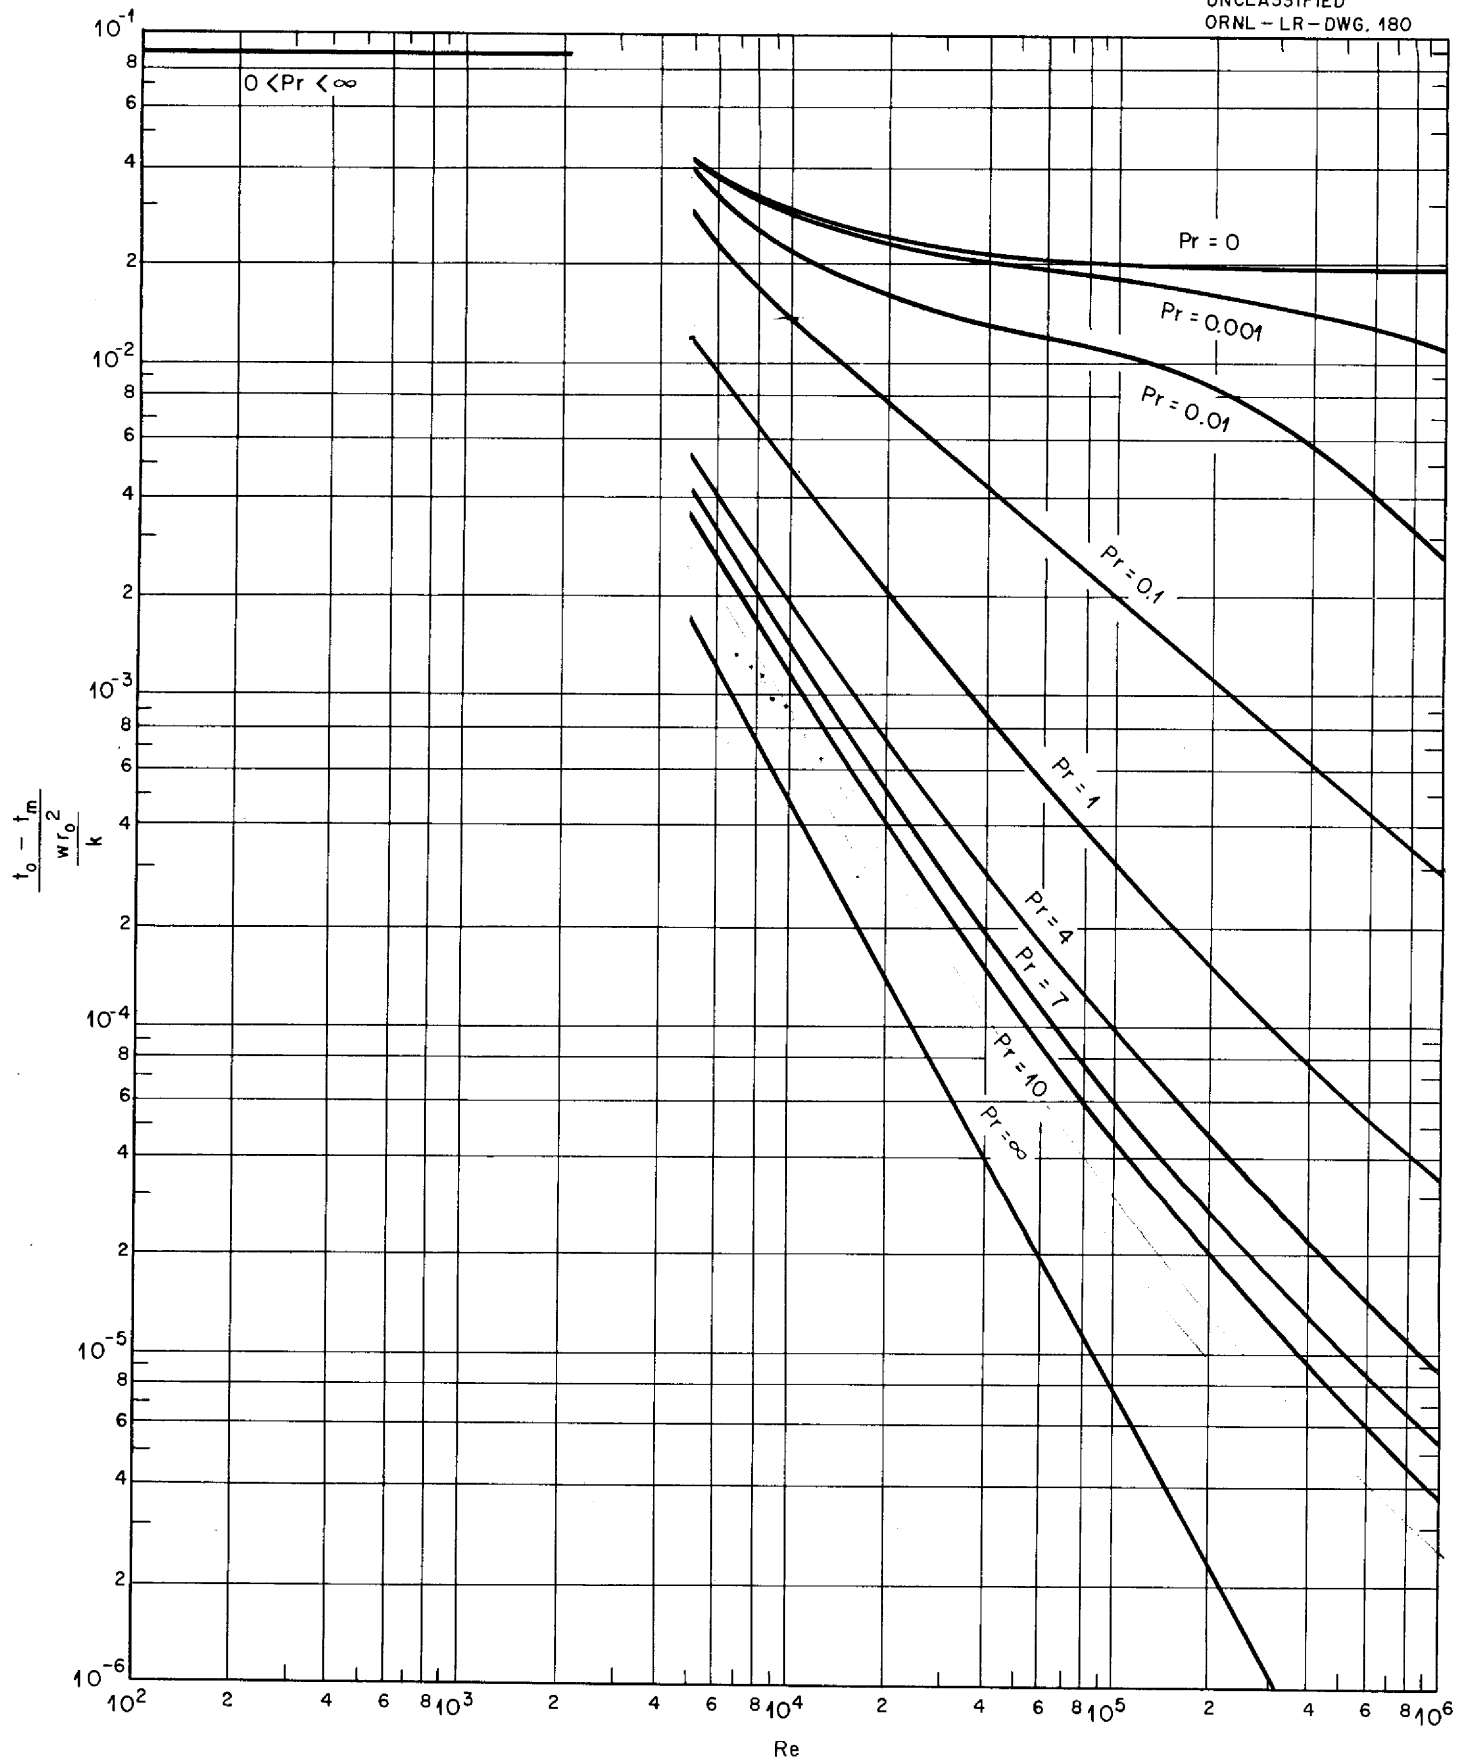


Fig. 5. Dimensionless Differences Between the Wall and Mixed-Mean Fluid Temperatures as Functions of Reynolds and Prandtl Moduli for Parallel Plate System (Walls Insulated).

DISCUSSION

The forced convection analyses presented here pertain to the parallel plates system. These analyses may also be used to estimate heat transfer in annulus systems where the inner to outer wall radius ratio does not differ significantly from unity; under such circumstances, the annulus satisfactorily approximates a parallel plates system.

The present report is the second one in a planned series which are to explore the experimental as well as theoretical aspects of volume-heat-source forced convection. Two specific research activities have almost been completed and are to be reported in the near future. One activity involves an experimental study of volume-heat-source forced convection in a pipe system in the laminar and turbulent flow regimes; comparisons are made with the previously developed theory. Another activity is a mathematical study of volume-heat-source forced convection in the laminar regime including a temperature dependent fluid viscosity.

APPENDIX 1

HYDRODYNAMIC RELATIONS FOR TURBULENT FLOW
IN A SMOOTH PARALLEL PLATES SYSTEM

The hydrodynamic relations given in Table I characterize turbulent flow in a smooth channel (parallel plates system). The manner in which this table was developed is illustrated below for the buffer layer.

The turbulent shear stress equation is expressed as

$$\frac{\tau}{\rho} = (\nu + \epsilon) \frac{du}{dy} \quad (a)$$

In the buffer layer, the shear stress is very closely equal to the wall shear stress, τ_0 , and the velocity distribution is given by,

$$u^+ = -3.05 + 5.00 \ln y^+ \quad (b)$$

Upon differentiating equation (b) it can be shown that

$$\frac{du}{dy} = \frac{5 \sqrt{\frac{\tau_0}{\rho}}}{y} \quad (c)$$

Upon substituting equation (c) and the wall shear stress in equation (a) and solving for the eddy diffusivity, there results,

$$\frac{\epsilon}{\nu} = \frac{y \sqrt{\frac{\tau_0}{\rho}}}{5\nu} - 1 \quad (d)$$

Two relations describing the pressure drop and wall shear stress in the parallel plates system are,

$$\frac{\Delta p}{\Delta x} = \frac{\zeta \gamma}{4r_o} \frac{u_m^2}{2g} \quad (e)$$

and

$$\tau_o = \frac{\Delta p}{\Delta x} r_o \quad (f)$$

where the quantity, $4r_o$, is sometimes called the equivalent duct diameter and, ζ , is the friction factor which is uniquely related to the Reynolds modulus. Upon substituting equation (e) into equation (f) there results,

$$\sqrt{\frac{\tau_o}{\rho}} = \sqrt{\frac{\zeta}{8}} u_m \quad (g)$$

The Reynolds modulus for the parallel plates system (based on the equivalent diameter) and the friction factor relation are expressed as,

$$Re = \frac{4 r_o u_m}{\nu} \quad (h)$$

and

$$\frac{\zeta}{8} = \frac{.023}{Re^{.2}} \text{ for } 5 \times 10^3 < Re < 10^6 \quad (i)$$

Upon substituting equations (g), (h), and (i) into equation (d) and simplifying, there results,

$$\frac{\epsilon}{\nu} = 0.0076 Re^{.9} n^{-1} \quad (j)$$

where $n = \frac{y}{r_o}$.

The thickness of the buffer layer can be obtained from the defining y^+ relation,

$$y^+ = \frac{y \sqrt{\frac{\tau_0}{\rho}}}{\nu} \quad (k)$$

Upon substituting equations (g), (h), and (i) into equation (k) and simplifying, there results,

$$n = \frac{26.3 y^+}{Re \cdot 9} \quad (l)$$

The buffer layer thus extends from $n = \frac{131.5}{Re \cdot 9}$ (corresponding to $y^+ = 5$) to $n = \frac{789}{Re \cdot 9}$ (corresponding to $y^+ = 30$).

APPENDIX 2

RADIAL HEAT FLOW RELATIONS

The turbulent velocity profile in the radial heat flow expression, equation (16) may be represented satisfactorily by two layers (a laminar layer and a turbulent core) rather than the four layers which are used in the temperature analysis. The laminar layer, which is postulated to extend to $y^+ = 12$, is represented by the linear velocity expression,

$$u^+ = y^+ \quad (m)$$

$$\text{or } u = 0.00575 u_m \text{Re}^{.8} n \text{ for } 0 < n < \frac{316}{\text{Re}^{.9}} \quad (n)$$

Equation (m) was reduced to equation (n), with the aid of equations (g), (h), and (i). The turbulent layer, which is postulated to extend from $y^+ = 12$ to the channel center, is represented by the one seventh power law expression,

$$u = B_0 n^{1/7} \quad (o)$$

where B_0 is related to the mean velocity on the basis that the sum of the volumetric flow rates in the laminar layer and the turbulent core is equal to the total volumetric flow rate; this relation is obtained as follows:

$$2 r_o \int_0^{r_L} u \, dr + 2 \int_{r_L}^{r_o} u \, dr \quad (p)$$

or

$$u_m = \int_{n_L}^1 u \, dn + \int_0^{n_L} u \, dn$$

$$= \frac{7}{8} B_o \left[1 - n_L^{8/7} \right] + 0.00575 u_m Re^{.8} \frac{n_L^2}{2} \quad (q)$$

$$\text{Thus } B_o = \frac{\left(1 - 0.00575 Re^{.8} \frac{n_L^2}{2} \right) u_m}{\frac{7}{8} (1 - n_L^{8/7})} = f' u_m \quad (r)$$

where n_L is the dimensionless thickness of the laminar layer equivalent to $y^+ = 12$.

The radial heat flow in the laminar layer is obtained by substituting equation (n) into equation (16) and integrating,

$$\frac{\frac{dq}{dA}}{\frac{Wr_o}{2}} = 2 \int_0^n 0.00575 Re^{.8} n \, dn - 2n$$

$$= \frac{0.0115}{2} Re^{.8} n^2 - 2n \quad (s)$$

The radial heat flow in the turbulent layer is obtained by substituting equations (o) and (r) into a modified form of equation (16) (limits are n_L to n),

$$\begin{aligned} \frac{\frac{dq}{dA}}{\frac{Wr_0}{2}} &= \frac{\left(\frac{dq}{dA}\right)_{n_L}}{\frac{Wr_0}{2}} + 2 \int_{n_L}^n \frac{u}{u_m} dn - 2(n - n_L) \\ &= \frac{\left(\frac{dq}{dA}\right)_{n_L}}{\frac{Wr_0}{2}} + \frac{2 \left[1 - \frac{0.00575}{2} Re \cdot n_L^2 \right] \left[n^{8/7} - n_L^{8/7} \right]}{(1 - n_L^{8/7})} - 2(n - n_L) \quad (t) \end{aligned}$$

Equations (s) and (t) are graphed in Figure 2 as functions of Reynolds modulus.

APPENDIX 3

TURBULENT FORCED CONVECTION IN A PARALLEL PLATES
SYSTEM WITH A UNIFORM WALL-HEAT-FLUX BUT NO
VOLUME HEAT SOURCES WITHIN THE FLUID

A list of some of the heat and momentum transfer analogy solutions given in the literature can be found in reference 1. Martinelli's solution for a parallel plates system is graphed in Figure 6 in terms of Nusselt, Reynolds, and Prandtl moduli. The Nusselt modulus can be expressed in terms of the wall-fluid temperature difference and the wall heat flux (these quantities arise in boundary value problem (15)),

$$\text{Nu} = \frac{h \ 4r_0}{k} = \frac{\left(\frac{dq}{dA}\right)_0 \ 4r_0}{(t_0 - t_m)k} \quad (u)$$

where h is the heat transfer conductance or coefficient.

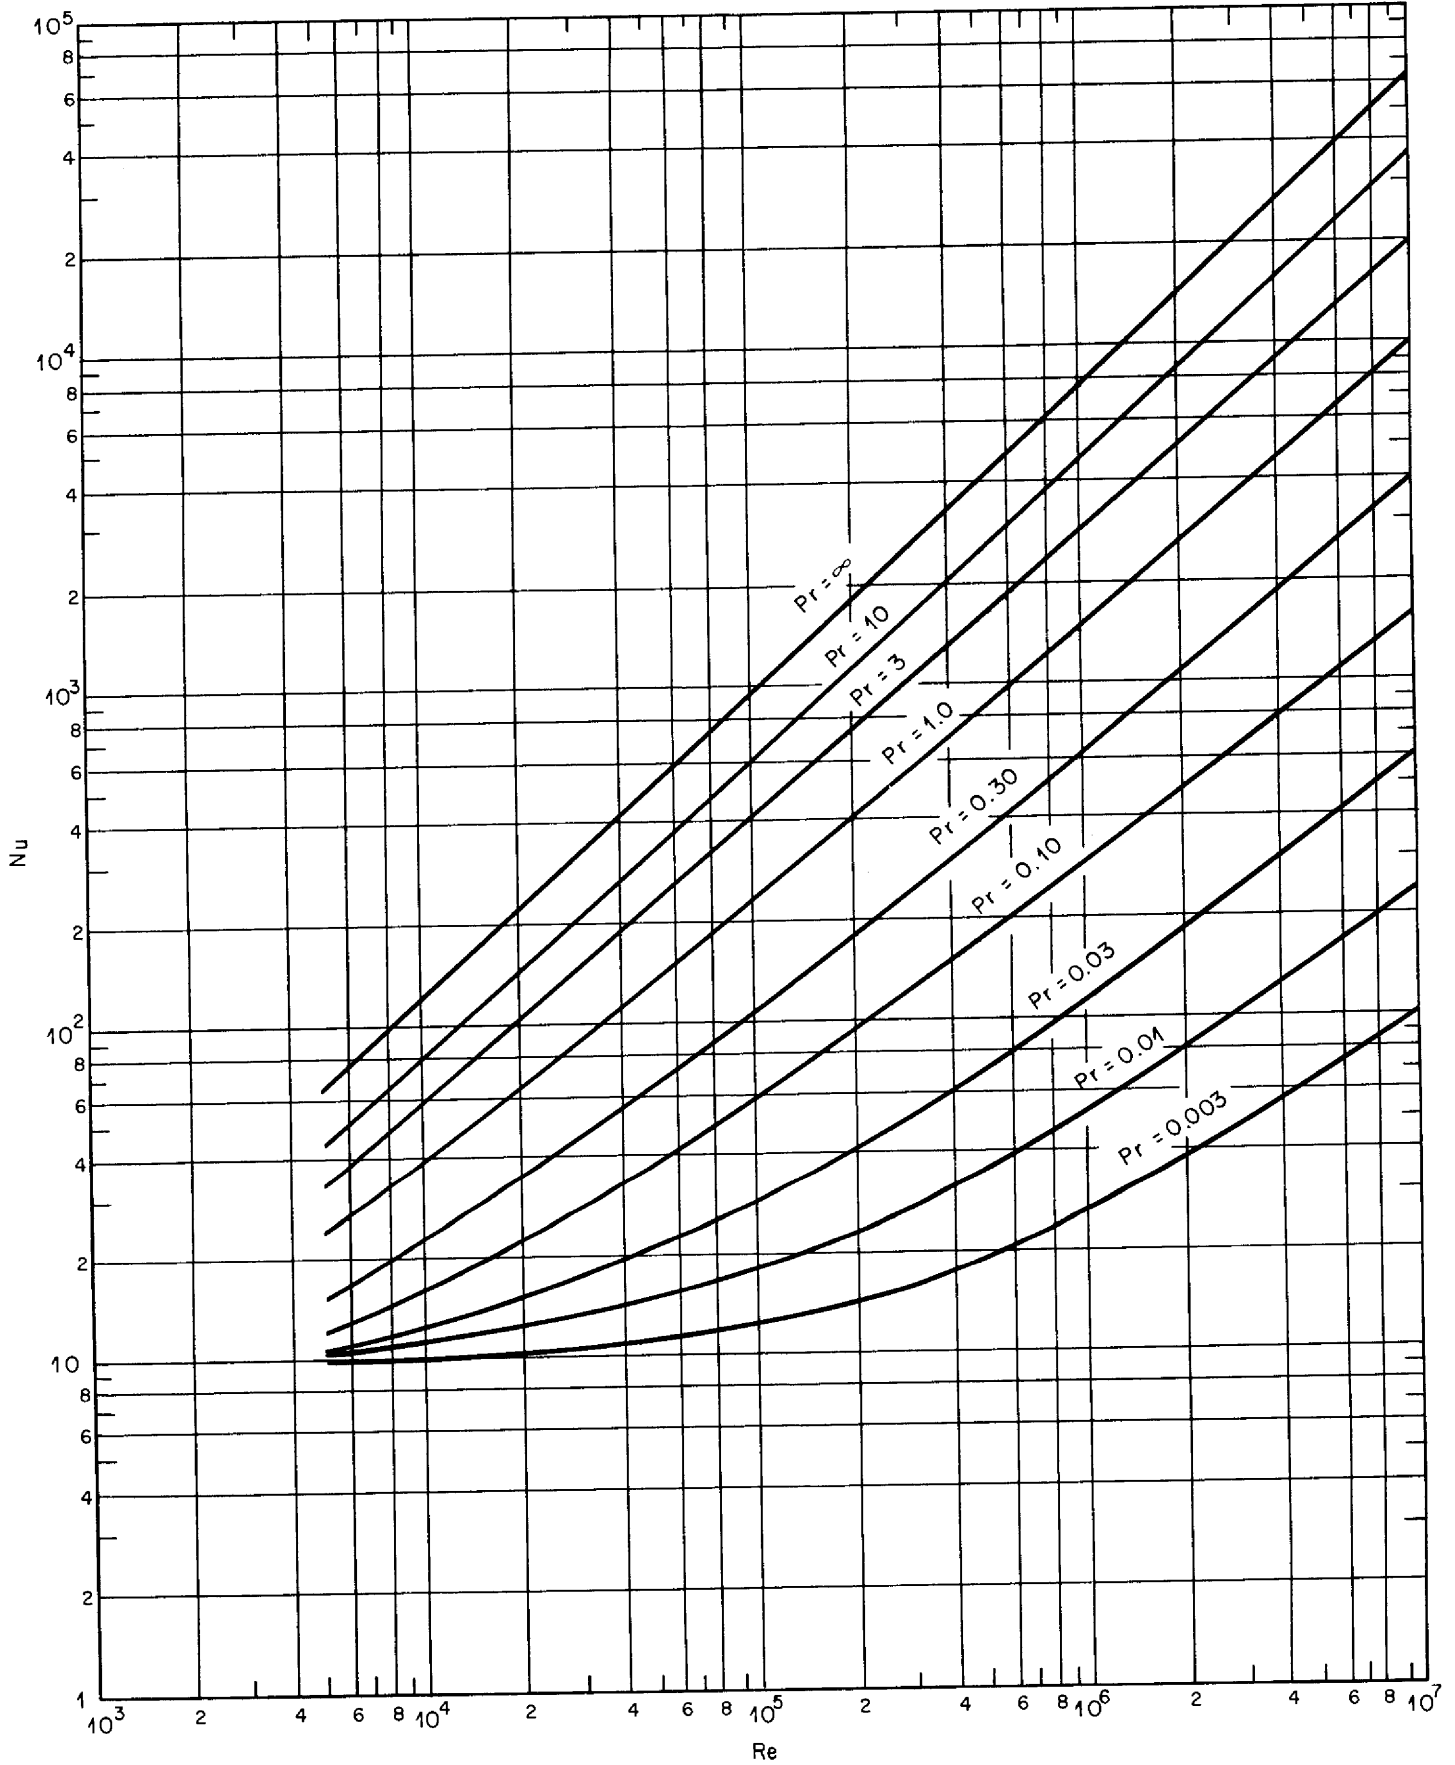


Fig. 6. Nusselt Modulus as a Function of Reynolds Modulus for Turbulent Heat Transfer Between Parallel Plates for Several Prandtl Moduli.

REFERENCES

1. Poppendiek, H. F. and Palmer, L. D., "Forced Convection Heat In Pipes with Volume Heat Sources Within The Fluids," ORNL-1395.
2. Martinelli, R. C., "Heat Transfer to Molten Metals," Trans. Am. Soc. Mech. Engr., 69, 1947, pp 947-959.