



# **EDB Postgres™ Hadoop Data Adapter Guide**

**Version 2.0**

**October 9, 2019**

EDB Postgres™ Hadoop Data Adapter Guide  
by EnterpriseDB® Corporation  
Copyright © 2019 EnterpriseDB Corporation. All rights reserved.

EnterpriseDB Corporation, 34 Crosby Drive Suite 100, Bedford, MA 01730, USA  
**T** +1 781 357 3390 **F** +1 978 589 5701 **E** [info@enterprisedb.com](mailto:info@enterprisedb.com) **www**.[enterprisedb.com](http://enterprisedb.com)

# Table of Contents

1	Introduction.....	4
1.1	What's New .....	4
1.1.1	Limitations .....	5
1.2	Typographical Conventions Used in this Guide .....	5
1.3	Supported Platforms.....	6
1.4	Supported Authentication Methods .....	7
1.4.1	Using LDAP Authentication.....	7
1.4.2	Using NOSASL Authentication.....	8
2	Architecture Overview .....	10
3	Installing and Configuring the Hadoop Data Adapter .....	11
3.1	Prerequisites .....	11
3.2	Using a Graphical Installer to Install the Data Adapter .....	13
3.3	Using an RPM Package to Install the Data Adapter .....	18
3.4	Configuring the Hadoop Data Adapter .....	20
3.4.1	CREATE EXTENSION.....	21
3.4.2	CREATE SERVER.....	22
3.4.3	CREATE USER MAPPING.....	24
3.4.4	CREATE FOREIGN TABLE.....	26
3.4.4.1	Data Type Mappings.....	29
4	Using the Hadoop Data Adapter .....	30
4.1	Identifying the Data Adapter Version.....	31

# 1 Introduction

The EDB Postgres Hadoop data adapter (`hdfs_fdw`) is a Postgres extension that allows you to access data that resides on a Hadoop file system from an Advanced Server or PostgreSQL server. The data adapter makes the Hadoop file system a read-only data source that you can use with Postgres functions and utilities, or in conjunction with other data that resides on a Postgres host.

The Postgres data adapter can be installed with a graphical installer or an RPM package. You can download an installer from the EnterpriseDB website; visit:

<http://www.enterprisedb.com>

This guide uses the term *Postgres* to refer to an instance of either EDB Postgres Advanced Server or PostgreSQL.

## 1.1 What's New

The following features have been added to the EDB Postgres Hadoop Data Adapter for release 2.0:

- The data adapter now supports use of LDAP authentication.
- The data adapter now supports use of Apache Spark and Spark Thrift Server.

### 1.1.1 Limitations

Please note: the `DATE` and `TIMESTAMP` data types are supported only on systems using Apache Hive version 2.3.1.

## 1.2 Typographical Conventions Used in this Guide

Certain typographical conventions are used in this manual to clarify the meaning and usage of various commands, statements, programs, examples, etc. This section provides a summary of these conventions.

In the following descriptions a *term* refers to any word or group of words that are language keywords, user-supplied values, literals, etc. A term's exact meaning depends upon the context in which it is used.

- *Italic font* introduces a term, typically, in the sentence that defines it for the first time.
- Fixed-width (mono-spaced) font is used for terms that must be given literally such as SQL commands, specific table and column names used in the examples, programming language keywords, etc. For example, `SELECT * FROM emp;`
- *Italic fixed-width font* is used for terms for which the user must substitute values in actual usage. For example, `DELETE FROM table_name;`
- A vertical pipe `|` denotes a choice between the terms on either side of the pipe. A vertical pipe is used to separate two or more alternative terms within square brackets (optional choices) or braces (one mandatory choice).
- Square brackets `[ ]` denote that one or none of the enclosed term(s) may be substituted. For example, `[ a | b ]`, means choose one of “a” or “b” or neither of the two.
- Braces `{ }` denote that exactly one of the enclosed alternatives must be specified. For example, `{ a | b }`, means exactly one of “a” or “b” must be specified.
- Ellipses `...` denote that the preceding term may be repeated. For example, `[ a | b ] ...` means that you may have the sequence, “b a a b a”.

### **1.3 Supported Platforms**

The data adapter is supported on:

- RHEL 6.5 and 7.0 (64-bit)
- CentOS 6.5 and 7.0 (64-bit)
- Debian 7 and 8
- SLES 11 and 12
- Ubuntu 14.04 LTS

The data adapter is supported on these platforms, using Advanced Server or PostgreSQL backing databases.

The Hadoop data adapter supports use of the Hadoop file system using a HiveServer2 interface or Apache Spark using the Spark Thrift Server.

## 1.4 Supported Authentication Methods

The data adapter supports NOSASL and LDAP authentication.

### 1.4.1 Using LDAP Authentication

When using the data adapter with LDAP authentication, you must first configure the Hive server or Spark server to use LDAP authentication. The configured server must provide a `hive-site.xml` file that includes the connection details for the LDAP server. For example:

```
<property>
  <name>hive.server2.authentication</name>
  <value>LDAP</value>
  <description>
    Expects one of [nosasl, none, ldap, kerberos, pam, custom].
    Client authentication types.
    NONE: no authentication check
    LDAP: LDAP/AD based authentication
    KERBEROS: Kerberos/GSSAPI authentication
    CUSTOM: Custom authentication provider
           (Use with property
hive.server2.custom.authentication.class)
    PAM: Pluggable authentication module
    NOSASL: Raw transport
  </description>
</property>
<property>
  <name>hive.server2.authentication.ldap.url</name>
  <value>ldap://localhost</value>
  <description>LDAP connection URL</description>
</property>
<property>
  <name>hive.server2.authentication.ldap.baseDN</name>
  <value>ou=People,dc=itzgeek,dc=local</value>
  <description>LDAP base DN</description>
</property>
```

Then, when starting the hive server, include the path to the `hive-site.xml` file in the command. For example:

```
./hive --config path_to_hive-site.xml_file --service HiveServer2
```

Where *path\_to\_hive-site.xml\_file* specifies the complete path to the `hive-site.xml` file.

When creating the user mapping, you must provide the name of a registered LDAP user and the corresponding password as options. For details, see Section [3.4.3](#).

## 1.4.2 Using NOSASL Authentication

When using NOSASL authentication with the data adapter, set the authorization to `None`, and the authentication method to `NOSASL` on the Hive or Spark server. For example, if you start the Hive server at the command line, include the `hive.server2.authentication` configuration parameter in the command:

```
hive -service hiveserver2 -hiveconf hive.server2.authentication=NOSASL
```

The following example uses the Ambari client interface to manage the Hadoop data source. After authenticating with Ambari, navigate to the `Hive` page, and select the `Configs` tab (see Figure 1.1).

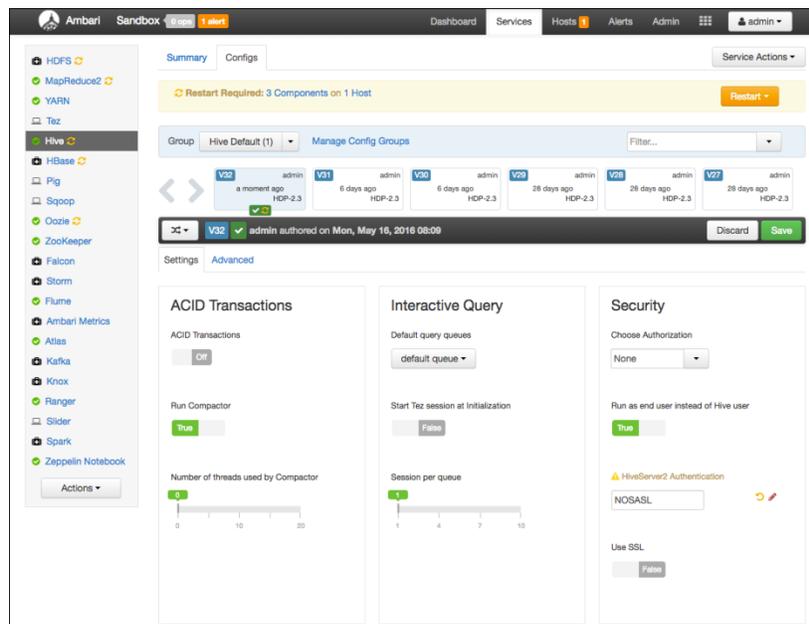


Figure 1.1 – The Ambari administrative interface.

Edit the `HiveServer2 Authentication` field in the `Security` pane, specifying `NOSASL`. Click the `Save` button in the upper-right corner; if prompted, provide a comment about the change and click `Save`, and then `OK` to confirm the change.

After modifying the authentication type, you must restart the Hive server. To restart the server, select `Restart All` from the `Service Actions` drop-down listbox. When prompted, select the `Confirm Restart All` button (see Figure 1.2).

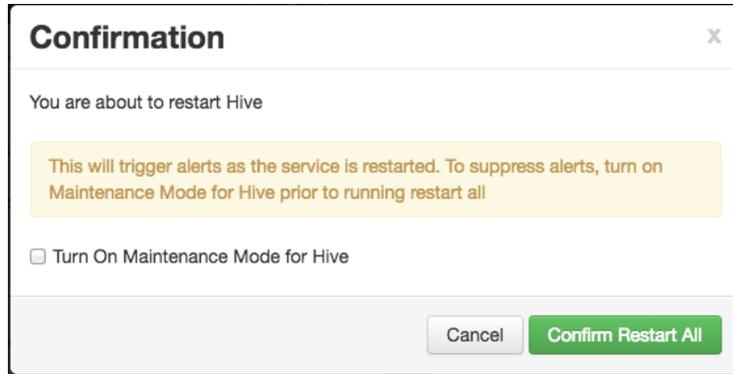


Figure 1.2 – Confirm that you wish to restart the server.

Ambari opens a dialog that will confirm the progress of the server restart (see Figure 1.3).


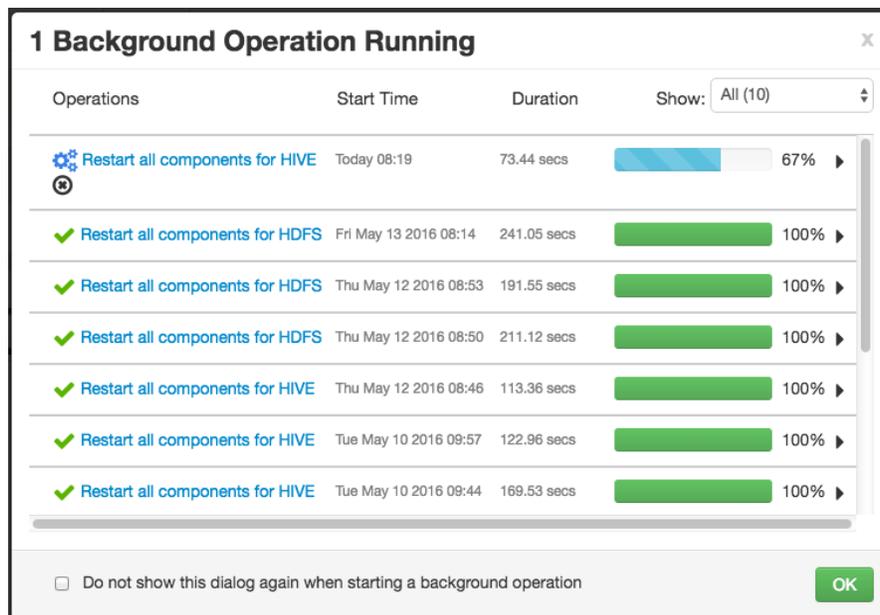


Figure 1.3 – Ambari confirms the progress as the servers restart.

## 2 Architecture Overview

Hadoop is a framework that allows you to store a large data set in a distributed file system.

The EDB Postgres Hadoop data wrapper provides an interface between a Hadoop file system and a Postgres database. The Hadoop data wrapper translates a Postgres `SELECT` statement into a query that is understood by the HiveQL or Spark SQL interface (see Figure 2.1).

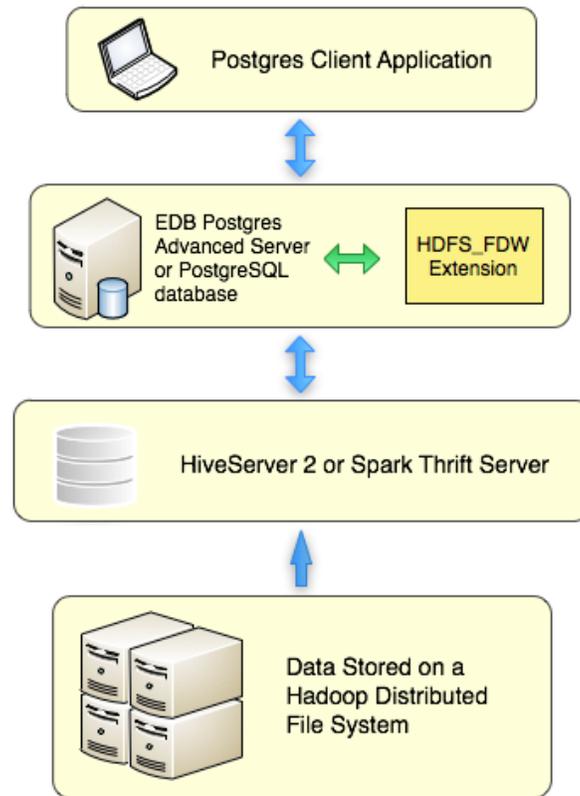

*Figure 2.1 - Using a Hadoop distributed file system with Postgres.*

When possible, the data adapter asks the Hive or Spark server to perform the actions associated with the `WHERE` clause of a `SELECT` statement. Pushing down the `WHERE` clause improves performance by decreasing the amount of data moving across the network. Currently push-down is not supported for:

- Aggregate Functions (such as `AVG`, `SUM`, and `COUNT`)
- Foreign Joins
- Sorts

## 3 Installing and Configuring the Hadoop Data Adapter

The Hadoop data adapter can be installed with a graphical installer, an RPM package, or via StackBuilder Plus. During the installation process, the installer will satisfy software prerequisites.

### 3.1 Prerequisites

Before installing the data adapter, install EDB Postgres Advanced Server or PostgreSQL on the host from which you will query Hadoop. After installing Postgres, modify the `postgresql.conf` file; the `postgresql.conf` file is located in:

- For an RPM server installation, `/var/lib/edb/as_version/data`
- For a graphical installation, `/opt/edb/as_version/data`

Modify the configuration file with your editor of choice, adding the `hdfs_fdw.jvmpath` parameter to the end of the configuration file, and setting the value to specify the location of the Java virtual machine (`libjvm.so`).

If your data contains columns with a type of `DATE`, you must also set the following values in the `postgresql.conf` file before using the data adapter:

```
datestyle = 'iso, dmy'
edb_redwood_date = off
```

You must also set the value of `hdfs_fdw.classpath` to indicate the location of the java class files used by the adapter; use a colon (`:`) as a delimiter between each path. For example:

```
hdfs_fdw.classpath=
'/usr/local/edb95/lib/postgresql/HiveJdbcClient-1.0.jar:
/home/edb/Projects/hadoop_fdw/hadoop/share/hadoop/common/hadoop-
common-2.6.4.jar:
/home/edb/Projects/hadoop_fdw/apache-hive-1.0.1-bin/lib/hive-
jdbc-1.0.1-standalone.jar'
```

Please note: the following work-around resolves an issue that will be fixed in the next minor release. If your data contains columns with a type of `DATE`, you must also set the following values in the `postgresql.conf` file before using the data adapter:

```
datestyle = 'iso, dmy'  
edb_redwood_date = off
```

After setting the parameter values, restart the Postgres server. For detailed information about controlling the service on an Advanced Server host, see the EDB Postgres Advanced Server Installation Guide, available at:

<https://www.enterprisedb.com/resources/product-documentation>

### 3.2 Using a Graphical Installer to Install the Data Adapter

You can download a graphical installer for the Hadoop data adapter from the EnterpriseDB website. After downloading the installer, assume superuser privileges, and invoke the installer with the command:

```
path_to_installer/edb_hdfs_fdw-9.x-x.x.x-linux-x64.run
```

The wizard will prompt you to select an installation language; select a language, and click the OK button. The setup wizard opens as shown in Figure 3.1.



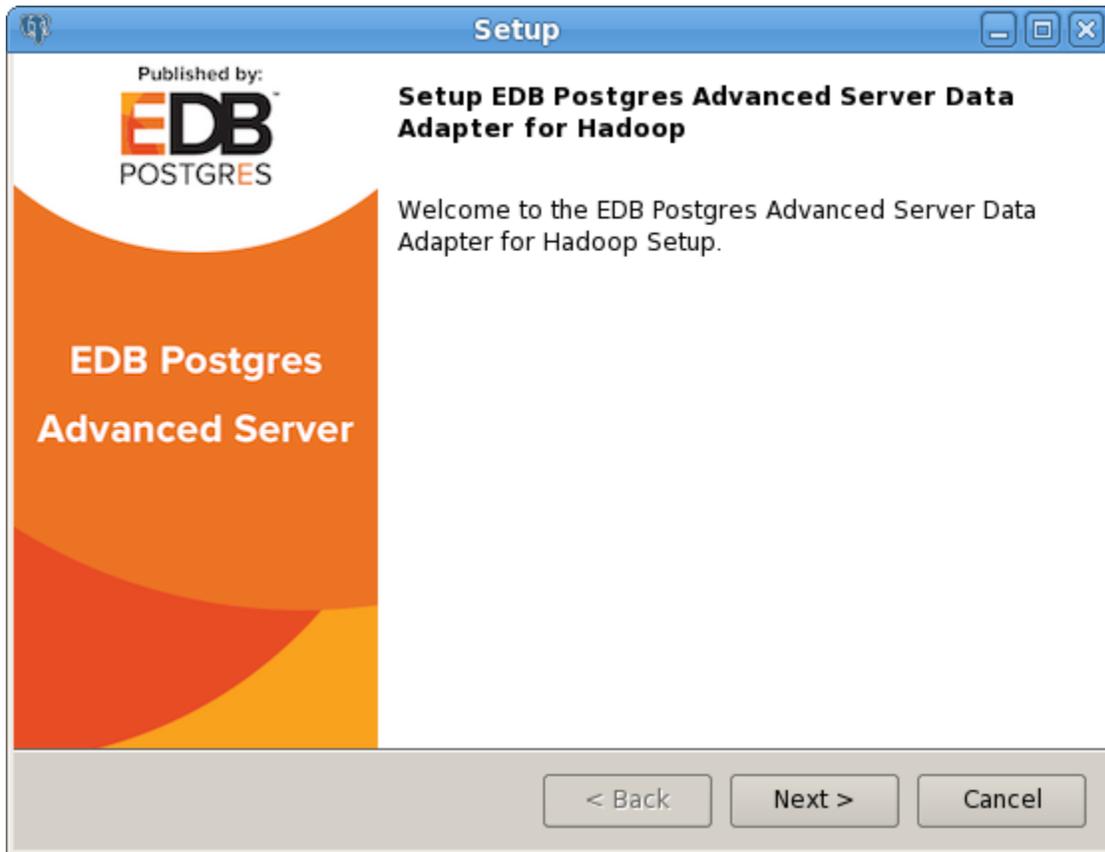


Figure 3.1 – The installation wizard Welcome screen.

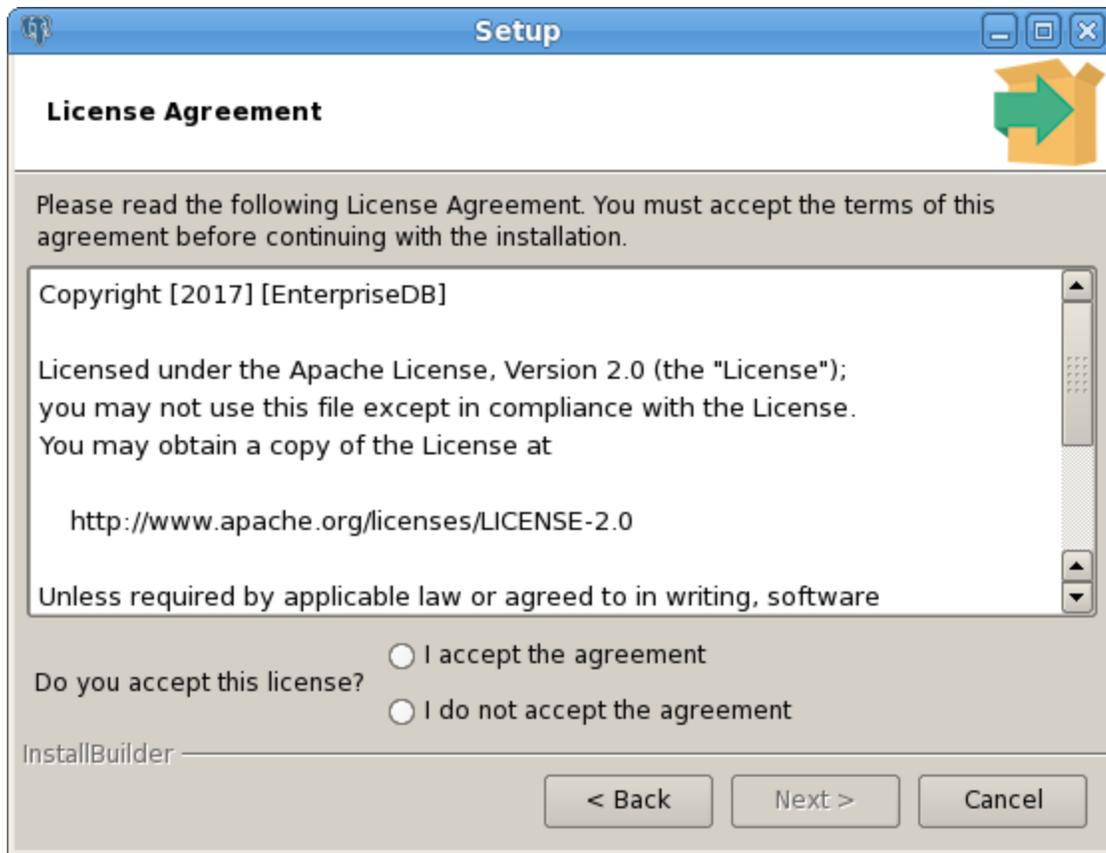


*Figure 3.2 – The installation wizard Welcome screen.*

The `License Agreement` opens (as shown in Figure 3.2); accept the agreement, and click `Next` to continue, or click `Cancel` to exit the installer.

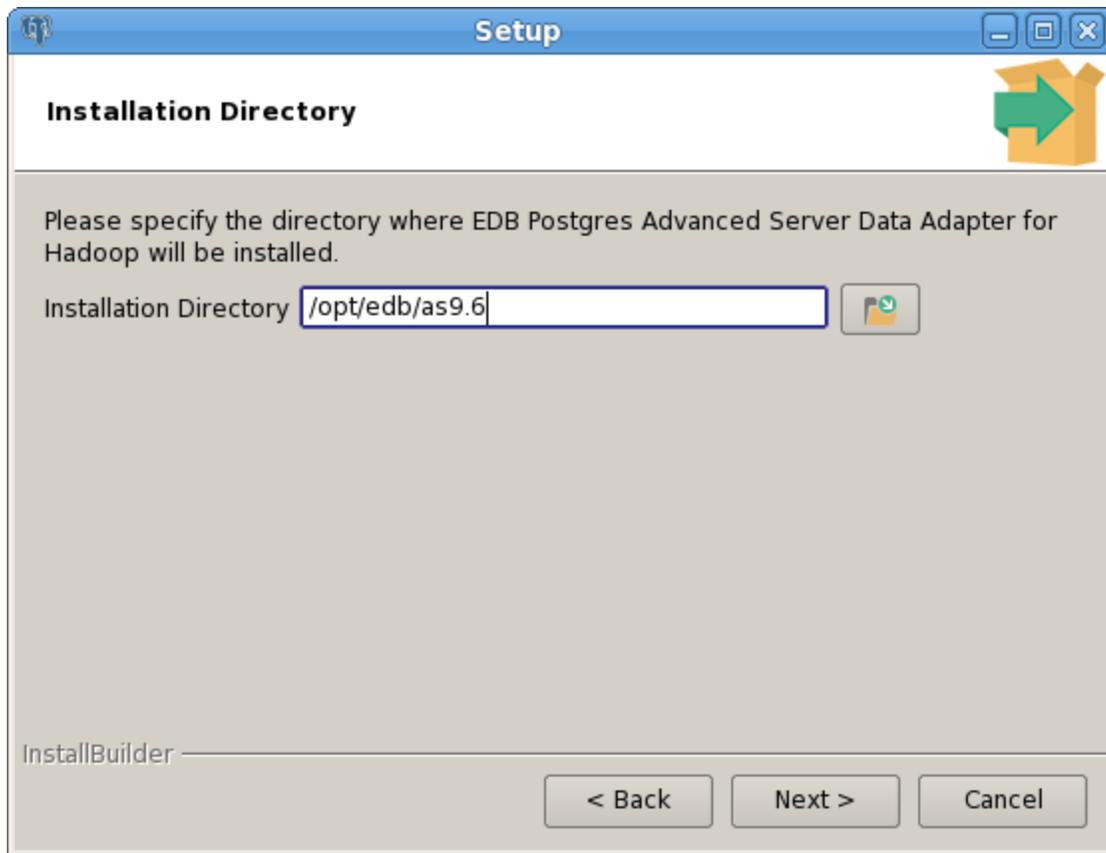


*Figure 3.3 – Specify an installation directory.*

Use the `Installation Directory` dialog (see Figure 3.3) to specify the installation directory for the data adapter; the default location is your Postgres installation directory.

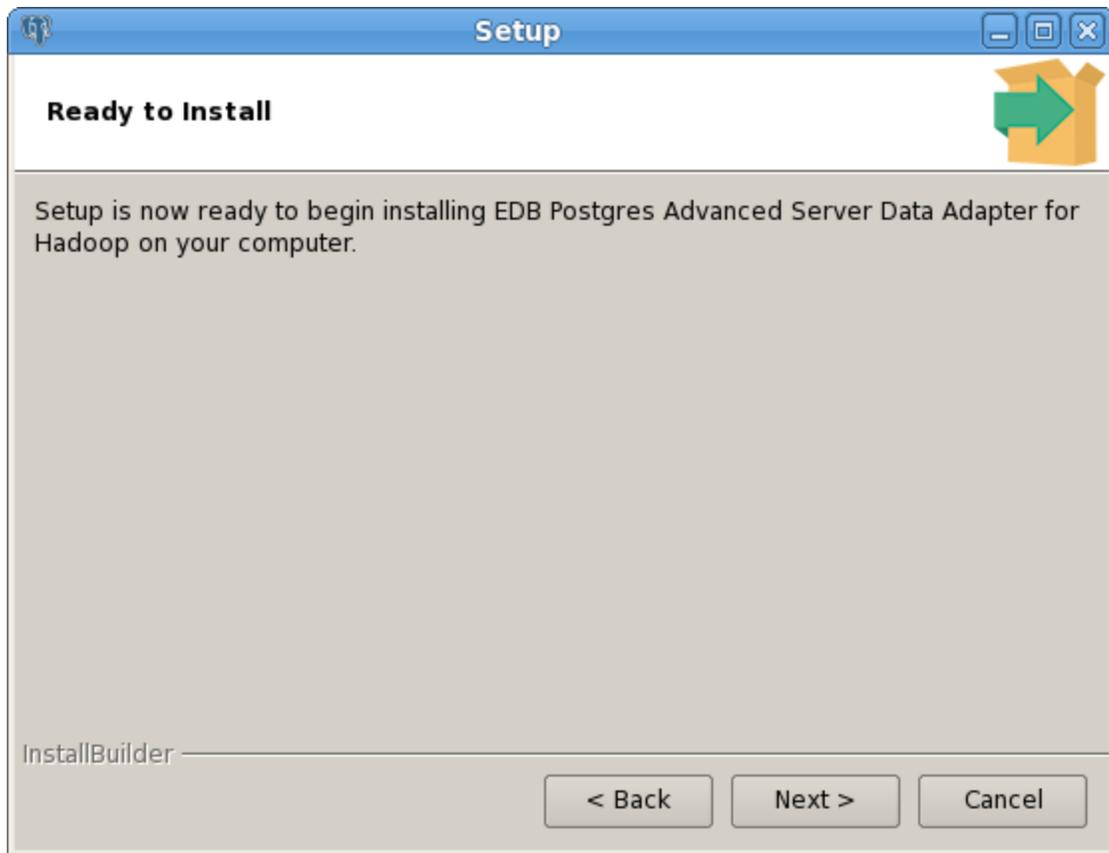

*Figure 3.4 – The setup wizard is ready to install the Hadoop Data Adapter.*

When the `Ready to Install` dialog opens, click the `Next` button to start installing the Hadoop Data Adapter (see Figure 3.4). Progress bars will keep you informed of the installer's progress.

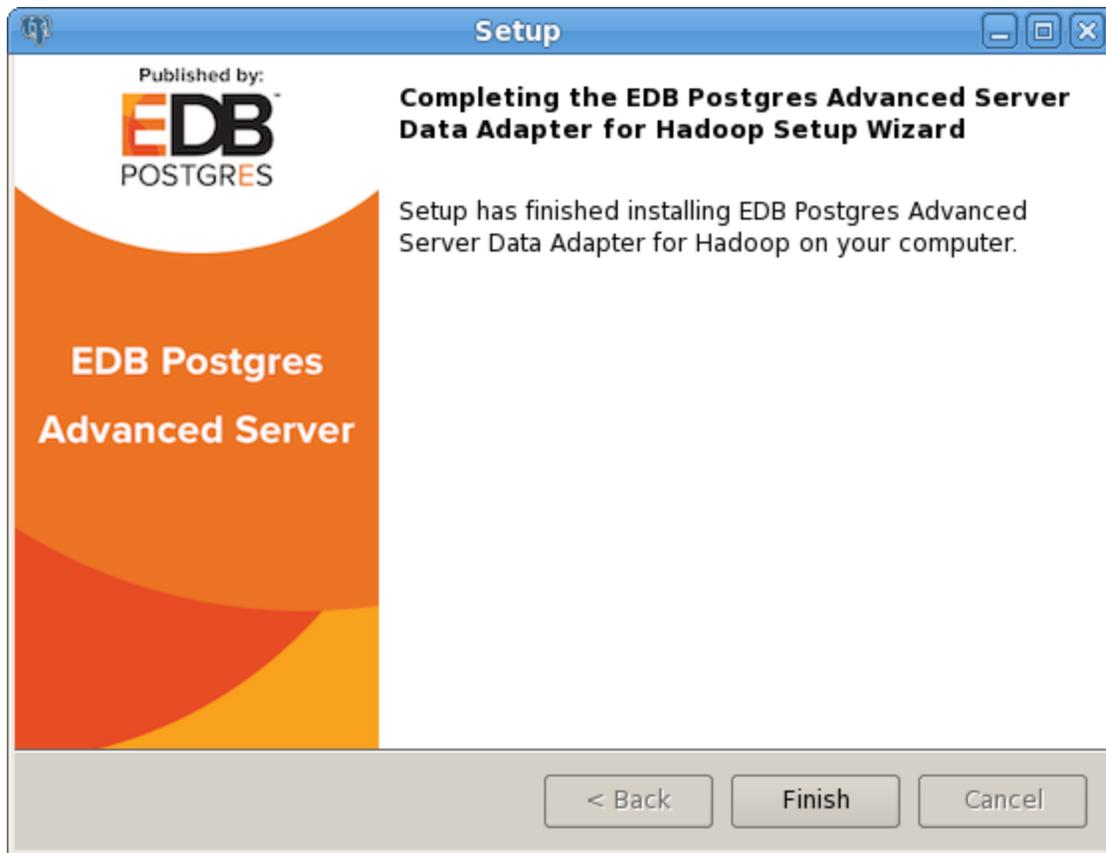

*Figure 3.5 – The setup wizard has completed the installation.*

When the installation completes, the setup wizard informs you that setup has finished installing the Hadoop Data Adapter; click `Finish` to close the wizard (see Figure 3.5).

### 3.3 Using an RPM Package to Install the Data Adapter

The RPM installation package for the Hadoop data adapter is available from the EnterpriseDB repository. Before installing the data adapter, you must:

- Install the epel-release package:

```
yum -y install https://dl.fedoraproject.org/pub/epel/epel-release-latest-7.noarch.rpm
```

Please note that you may need to enable the `[extras]` repository definition in the `CentOS-Base.repo` file (located in `/etc/yum/repos.d`).

You must also have credentials that allow access to the EnterpriseDB repository. For information about requesting credentials, visit:

<https://info.enterprisedb.com/rs/069-ALB-339/images/Repository%20Access%2004-09-2019.pdf>

After receiving your repository credentials you can:

1. Create the repository configuration file.
2. Modify the file, providing your user name and password.
3. Install the data adapter.

#### Creating a Repository Configuration File

To create the repository configuration file, assume superuser privileges and invoke the following command:

```
yum -y install https://yum.enterprisedb.com/edb-repo-rpms/edb-repo-latest.noarch.rpm
```

The repository configuration file is named `edb.repo`. The file resides in `/etc/yum/repos.d`.

After creating the `edb.repo` file, use your choice of editor to ensure that the value of the `enabled` parameter is `1`, and replace the `username` and `password` placeholders in the `baseurl` specification with the name and password of a registered EnterpriseDB user.

```
[edb]
```

```
name=EnterpriseDB RPMs $releasever - $basearch
baseurl=https://<username>:<password>@yum.enterprisedb.com/
edb/redhat/rhel-$releasever-$basearch
enabled=1
gpgcheck=1
gpgkey=file:///etc/pki/rpm-gpg/ENTERPRISEDB-GPG-KEY
```

After saving your changes to the configuration file, you can use the `yum install` command to the data adapter:

```
yum install edb-as-xx-hdfs_fdw
```

When you install an RPM package that is signed by a source that is not recognized by your system, yum may ask for your permission to import the key to your local server. If prompted, and you are satisfied that the packages come from a trustworthy source, enter a `y`, and press `Return` to continue.

During the installation, yum may encounter a dependency that it cannot resolve. If it does, it will provide a list of the required dependencies that you must manually resolve.

### **3.4 Configuring the Hadoop Data Adapter**

Before creating the extension and the database objects that use the extension, you must modify the Postgres host, providing the location of the supporting libraries; for details, see Section [3.1](#). Then, before using the data adapter, you must:

1. Use the `CREATE EXTENSION` command to create the Hadoop data adapter extension on the Postgres host. For details, see Section [3.4.1](#).
2. Use the `CREATE SERVER` command to define a connection to the Hadoop file system. For details, see Section [3.4.2](#).
3. Use the `CREATE USER MAPPING` command to define a mapping that associates a Postgres role with the server. For details, see Section [3.4.3](#).
4. Use the `CREATE FOREIGN TABLE` command to define a table in the Advanced Server database that corresponds to a database that resides on the Hadoop cluster. For details, see Section [3.4.4](#).

### 3.4.1 CREATE EXTENSION

Use the `CREATE EXTENSION` command to create the `hdfs_fdw` extension. To invoke the command, use your client of choice (for example, `psql`) to connect to the Postgres database from which you will be querying the Hive or Spark server, and invoke the command:

```
CREATE EXTENSION [IF NOT EXISTS] hdfs_fdw [WITH] [SCHEMA
  schema_name];
```

#### Parameters

`IF NOT EXISTS`

Include the `IF NOT EXISTS` clause to instruct the server to issue a notice instead of throwing an error if an extension with the same name already exists.

*schema\_name*

Optionally specify the name of the schema in which to install the extension's objects.

#### Example

The following command installs the `hdfs_fdw` data adapter:

```
CREATE EXTENSION hdfs_fdw;
```

For more information about using the `CREATE EXTENSION` command, see:

<https://www.postgresql.org/docs/current/static/sql-createextension.html>.

### 3.4.2 CREATE SERVER

Use the `CREATE SERVER` command to define a connection to a foreign server. The syntax is:

```
CREATE SERVER server_name FOREIGN DATA WRAPPER hdfs_fdw
  [OPTIONS (option 'value' [, ...])]
```

The role that defines the server is the owner of the server; use the `ALTER SERVER` command to reassign ownership of a foreign server. To create a foreign server, you must have `USAGE` privilege on the foreign-data wrapper specified in the `CREATE SERVER` command.

#### Parameters

*server\_name*

Use *server\_name* to specify a name for the foreign server. The server name must be unique within the database.

FOREIGN\_DATA\_WRAPPER

Include the `FOREIGN_DATA_WRAPPER` clause to specify that the server should use the `hdfs_fdw` foreign data wrapper when connecting to the cluster.

OPTIONS

Use the `OPTIONS` clause of the `CREATE SERVER` command to specify connection information for the foreign server. You can include:

Option	Description
<code>host</code>	The address or hostname of the Hadoop cluster. The default value is 127.0.0.1.
<code>port</code>	The listener port number of the client. The default is 10000.
<code>client_type</code>	Specify <code>hiveserver2</code> or <code>spark</code> as the client type. To use the <code>ANALYZE</code> statement on Spark, you must specify a value of <code>spark</code> ; if you do not specify a value for <code>client_type</code> , the default value is <code>hiveserver2</code> .
<code>auth_type</code>	The authentication type of the client; specify <code>LDAP</code> or <code>NOSASL</code> . If you do not specify an <code>auth_type</code> , the data wrapper will decide the <code>auth_type</code> value on the basis of the user mapping: <ul style="list-style-type: none"> <li>If the user mapping includes a user name and password, the data wrapper will use <code>LDAP</code> authentication.</li> <li>If the user mapping does not include a user name and password, the data wrapper will use <code>NOSASL</code> authentication.</li> </ul>

<code>connect_timeout</code>	The length of time before a connection attempt times out. The default value is 300 seconds.
<code>fetch_size</code>	A user-specified value that is provided as a parameter to the JDBC API <code>setFetchSize</code> . The default value is 10,000.
<code>log_remote_sql</code>	If <code>true</code> , logging will include SQL commands executed on the remote hive server and the number of times that a scan is repeated. The default is <code>false</code> .
<code>query_timeout</code>	Use <code>query_timeout</code> to provide the number of seconds after which a request will timeout if it is not satisfied by the Hive server. Query timeout is not supported by the Hive JDBC driver.
<code>use_remote_estimate</code>	Include the <code>use_remote_estimate</code> to instruct the server to use <code>EXPLAIN</code> commands on the remote server when estimating processing costs. By default, <code>use_remote_estimate</code> is <code>false</code> , and remote tables are assumed to have 1000 rows.

### Example

The following command creates a foreign server named `hdfs_server` that uses the `hdfs_fdw` foreign data wrapper to connect to a host with an IP address of `170.11.2.148`:

```
CREATE SERVER hdfs_server FOREIGN DATA WRAPPER hdfs_fdw OPTIONS (host
'170.11.2.148', port '10000', client_type 'hiveserver2', auth_type 'LDAP',
connect_timeout '10000', query_timeout '10000');
```

The foreign server uses the default port (10000) for the connection to the client on the Hadoop cluster; the connection uses an LDAP server.

For more information about using the `CREATE SERVER` command, see:

<https://www.postgresql.org/docs/current/static/sql-createserver.html>

### 3.4.3 CREATE USER MAPPING

Use the `CREATE USER MAPPING` command to define a mapping that associates a Postgres role with a foreign server:

```
CREATE USER MAPPING FOR role_name SERVER server_name
    [OPTIONS (option 'value' [, ...])];
```

You must be the owner of the foreign server to create a user mapping for that server.

Please note: the data adapter supports NOSASL and LDAP authentication. If you are creating a user mapping for a server that uses LDAP authentication, use the `OPTIONS` clause to provide the connection credentials (the username and password) for an existing LDAP user. If the server uses NOSASL authentication, omit the `OPTIONS` clause when creating the user mapping.

#### Parameters

*role\_name*

Use *role\_name* to specify the role that will be associated with the foreign server.

*server\_name*

Use *server\_name* to specify the name of the server that defines a connection to the Hadoop cluster.

`OPTIONS`

Use the `OPTIONS` clause to specify connection information for the foreign server. If you are using LDAP authentication, provide a:

*username*: the name of the user on the LDAP server.

*password*: the password associated with the username.

If you do not provide a user name and password, the data wrapper will use NOSASL authentication.

#### Example

The following command creates a user mapping for a role named `enterprisedb`; the mapping is associated with a server named `hdfs_server`:

```
CREATE USER MAPPING FOR enterprisedb SERVER hdfs_server;
```

If the database host uses LDAP authentication, provide connection credentials when creating the user mapping:

```
CREATE USER MAPPING FOR enterprisedb SERVER hdfs_server OPTIONS (username  
'alice', password '1safepwd');
```

The command creates a user mapping for a role named `enterprisedb` that is associated with a server named `hdfs_server`. When connecting to the LDAP server, the Hive or Spark server will authenticate as `alice`, and provide a password of `1safepwd`.

For detailed information about the `CREATE USER MAPPING` command, see:

<https://www.postgresql.org/docs/current/static/sql-createusermapping.html>

### 3.4.4 CREATE FOREIGN TABLE

A foreign table is a pointer to a table that resides on the Hadoop host. Before creating a foreign table definition on the Postgres server, connect to the Hive or Spark server and create a table; the columns in the table will map to columns in a table on the Postgres server. Then, use the `CREATE FOREIGN TABLE` command to define a table on the Postgres server with columns that correspond to the table that resides on the Hadoop host. The syntax is:

```
CREATE FOREIGN TABLE [ IF NOT EXISTS ] table_name ( [
  { column_name data_type [ OPTIONS ( option 'value' [, ... ] ) ]
  [ COLLATE collation ] [ column_constraint [ ... ] ]
    | table_constraint }
  [, ... ]
] )
[ INHERITS ( parent_table [, ... ] ) ]
  SERVER server_name [ OPTIONS ( option 'value' [, ... ] ) ]
```

where *column\_constraint* is:

```
[ CONSTRAINT constraint_name ]
{ NOT NULL | NULL | CHECK (expr) [ NO INHERIT ] | DEFAULT default_expr }
```

and *table\_constraint* is:

```
[ CONSTRAINT constraint_name ] CHECK (expr) [ NO INHERIT ]
```

#### Parameters

*table\_name*

Specifies the name of the foreign table; include a schema name to specify the schema in which the foreign table should reside.

IF NOT EXISTS

Include the `IF NOT EXISTS` clause to instruct the server to not throw an error if a table with the same name already exists; if a table with the same name exists, the server will issue a notice.

*column\_name*

Specifies the name of a column in the new table; each column should correspond to a column described on the Hive or Spark server.

*data\_type*

Specifies the data type of the column; when possible, specify the same data type for each column on the Postgres server and the Hive or Spark server. If a data type with the same name is not available, the Postgres server will attempt to cast the data type to a type compatible with the Hive or Spark server. If the server cannot identify a compatible data type, it will return an error. For more information about data type mappings, please see Section [3.4.4.1](#).

`COLLATE collation`

Include the `COLLATE` clause to assign a collation to the column; if not specified, the column data type's default collation is used.

`INHERITS (parent_table [, ... ])`

Include the `INHERITS` clause to specify a list of tables from which the new foreign table automatically inherits all columns. Parent tables can be plain tables or foreign tables.

`CONSTRAINT constraint_name`

Specify an optional name for a column or table constraint; if not specified, the server will generate a constraint name.

`NOT NULL`

Include the `NOT NULL` keywords to indicate that the column is not allowed to contain null values.

`NULL`

Include the `NULL` keywords to indicate that the column is allowed to contain null values. This is the default.

`CHECK (expr) [NO INHERIT]`

Use the `CHECK` clause to specify an expression that produces a Boolean result that each row in the table must satisfy. A check constraint specified as a column constraint should reference that column's value only, while an expression appearing in a table constraint can reference multiple columns.

A `CHECK` expression cannot contain subqueries or refer to variables other than columns of the current row.

Include the `NO INHERIT` keywords to specify that a constraint should not propagate to child tables.

`DEFAULT default_expr`

Include the `DEFAULT` clause to specify a default data value for the column whose column definition it appears within. The data type of the default expression must match the data type of the column.

```
SERVER server_name [OPTIONS (option 'value' [, ... ] ) ]
```

To create a foreign table that will allow you to query a table that resides on a Hadoop file system, include the `SERVER` clause and specify the `server_name` of the foreign server that uses the Hadoop data adapter.

Use the `OPTIONS` clause to specify the following *options* and their corresponding values:

option	value
dbname	The name of the database on the Hive server; the database name is required.
table_name	The name of the table on the Hive server; the default is the name of the foreign table.

## Example

To use data that is stored on a distributed file system, you must create a table on the Postgres host that maps the columns of a Hadoop table to the columns of a Postgres table. For example, for a Hadoop table with the following definition:

```
CREATE TABLE weblog (
  client_ip      STRING,
  full_request_date  STRING,
  day           STRING,
  month        STRING,
  month_num    INT,
  year         STRING,
  hour         STRING,
  minute       STRING,
  second       STRING,
  timezone     STRING,
  http_verb    STRING,
  uri          STRING,
  http_status_code  STRING,
  bytes_returned  STRING,
  referrer     STRING,
  user_agent    STRING)
row format delimited
fields terminated by '\t';
```

You should execute a command on the Postgres server that creates a comparable table on the Postgres server:

```
CREATE FOREIGN TABLE weblog
(
  client_ip      TEXT,
  full_request_date  TEXT,
  day           TEXT,
  Month         TEXT,
```

```

month_num          INTEGER,
year              TEXT,
hour              TEXT,
minute            TEXT,
second            TEXT,
timezone          TEXT,
http_verb         TEXT,
uri               TEXT,
http_status_code  TEXT,
bytes_returned    TEXT,
referrer          TEXT,
user_agent        TEXT
)
SERVER hdfs_server
  OPTIONS (dbname 'webdata', table_name 'weblogs');

```

Include the `SERVER` clause to specify the name of the database stored on the Hadoop file system (`webdata`) and the name of the table (`weblogs`) that corresponds to the table on the Postgres server.

For more information about using the `CREATE FOREIGN TABLE` command, see:

<https://www.postgresql.org/docs/current/static/sql-createforeigntable.html>

### 3.4.4.1 Data Type Mappings

When using the foreign data wrapper, you must create a table on the Postgres server that mirrors the table that resides on the Hive server. The Hadoop data wrapper will automatically convert the following Hive data types to the target Postgres type:

Hive	PostgreSQL
BCHAR	CHAR
BIGINT	INTEGER
BOOLEAN	BOOLEAN
BYTEA	BYTEA
CHAR	CHAR
DATE	DATE
FLOAT4	FLOAT
FLOAT8	FLOAT
INT	INTEGER
INT4	INT8
INT8 (BIGINT)	INTEGER
NAME	NAME
SMALLINT	INTEGER
STRING	TEXT
TEXT	TEXT
TIME	DATETIME
TIMESTAMP with timezone	DATETIME
TIMESTAMP without timezone	DATETIME
TINYINT	INTEGER
VARCHAR	VARCHAR

## 4 Using the Hadoop Data Adapter

After configuring the data adapter, and creating a table on the Postgres server that mirrors the table on the distributed file system, you can seamlessly access the data from a Postgres server.

To query data on the Hadoop file system, connect to your Postgres database with your choice of client (for example, the PEM client or EDB-PSQL). When you query the table that resides on the Postgres host, the queries will be re-directed to the Hadoop host.

### *Query Pushdown*

When possible, the data adapter pushes down the `WHERE` predicate and target column list to the Hive server. Supporting operations (aggregates, foreign joins, and sorts) are performed by the database server. Remote push down provides better performance and improves network traffic by distributing processing to the remote server when possible, decreasing the amount of data that must travel to the database server.

You can demonstrate command push-down by including the `EXPLAIN` clause in a query of a foreign table:

```
EXPLAIN VERBOSE SELECT DISTINCT client_ip IP, count(*) FROM weblogs WHERE uri
= '/demo' GROUP BY IP HAVING count(*) > 10;
          QUERY PLAN
-----
HashAggregate  (cost=21.00..23.00 rows=200 width=32)
  Output: client_ip, (count(*))
  Group Key: weblogs.client_ip, count(*)
  -> HashAggregate  (cost=17.50..20.00 rows=200 width=32)
    Output: client_ip, count(*)
    Group Key: weblogs.client_ip
    Filter: (count(*) > 10)
    -> Foreign Scan on public.weblogs  (cost=100.00..10.00 rows=1000
width=32)
      Output: client_ip, full_request_date, day, month, month_num,
year, hour, minute, second, timezone, http_verb, uri, http_status_code,
bytes_returned, referrer, user_agent
      Remote SQL: SELECT client_ip FROM fdw_db.weblogs WHERE ((uri =
'/demo'))
(10 rows)
```

As noted near the end of the query plan, the `WHERE` clause is performed on the Remote server.

## 4.1 Identifying the Data Adapter Version

The HDFS\_FDW data adapter includes a function that you can use to identify the currently installed version of the `.so` file for the data adapter. To use the function, connect to the Postgres server, and enter:

```
SELECT hdfs_fdw_version();
```

The function returns the version number:

```
hdfs_fdw_version
-----
20003
```